




## OMO BOLLARD

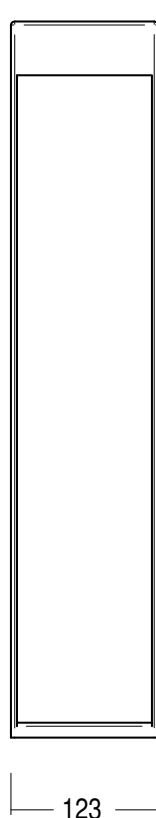

IP 65

IK 08

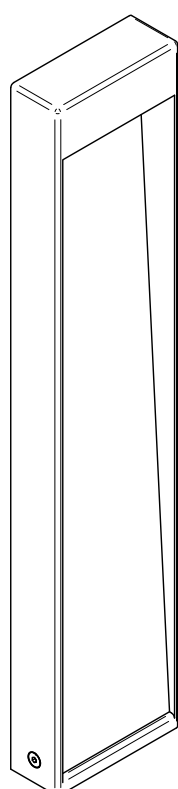

### MODEL:

Code	NDT1H1 - H 200 mm 24 V
	NDT1H2 - H 350 mm 24 V
	NDT1H3H - H 600 mm 24 V
	NDT2H2 - H 350 mm 110-277 V
	NDT2H3 - H 600 mm 110-277 V
Product family	Outdoor Lighting

### TECHNICAL DETAILS:

Installation	to the ground with stainless steel screws included
Class	I
Power	3 W
Luminous flux	280 lm at 3000K / 220 lm at 2700K
LED color	2700K, 3000K
Turtle Safe LED on request*	Amber LED, $\geq 590$ Nanometer Wavelength spectrum
Resistance to breakage	IK 08
Protection degree	IP 65
Material	stainless steel AISI 316 and powder coated finish
Driver	24V remote (not included, 110-277V inside included)
Cables	wired with 20 cm
Diffuser	opal polycarbonate
Accessories	ZA004: Fixing plate with bolts
Supply	110-277 V
Light emission	Indirect light

### COLORS:



.IN  
.BT  
.NB

Inox  
Browntech  
Natural Black