


## RAY



IP 65

IK 08

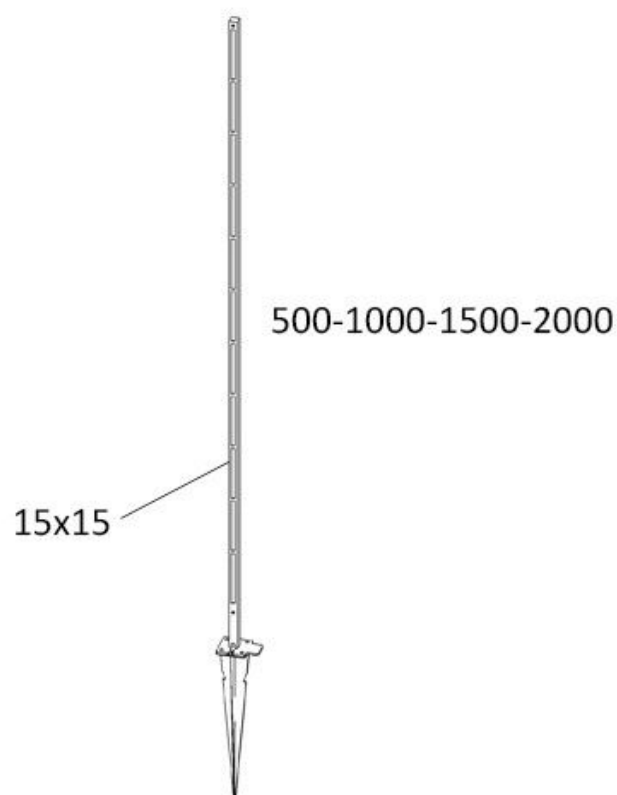

### MODEL:



Code	ACVP1H1 (4,8W/450lm/24V/H 500mm) ACVP1H2 (9,6W/900lm/24V/H 1000mm) ACVP1H3 (14,4W/1350lm/24V/H 1500mm) ACVP1H4 (19,2W/1800lm/24V/H 2000mm)
Product family	Outdoor Lighting

### TECHNICAL DETAILS:

Installation	spike to be planted
Class	III
Power	4,8W(H500), 9,6W(H1000), 14,4W(H1500), 19,2W (H2000)
Luminous flux	450lm (H500), 900lm (H1000), 1350lm (H1500), 1800lm (H2000)
LED color	2700K, 3000K
Resistance to breakage	IK 08
Protection degree	IP 65
Material	stainless steel AISI 316L
Driver	24V remote (not supplied)
Cables	equipped with 5 mt cable H05RNF
Other options	connector IP 68
Supply	24 V
Dimensions	500, 1000, 1500, 2000 mm

It respects the laws against lighting pollution.  
Spike fixing CN1P1 or with housing CN1P2.

### COLORS:

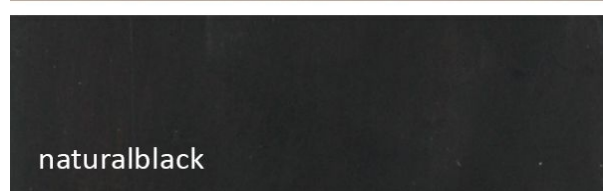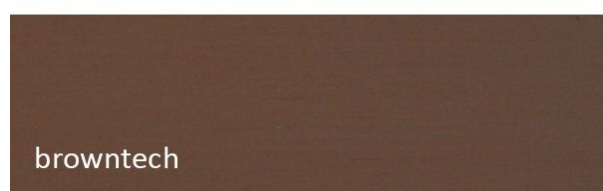

.IN  
.BT  
.NB

Inox  
Browntech  
Natural Black