







BULLARD BOLLARDS

Tret Up

Tret Up is made of die-cast aluminium. An organically shaped column mounted light with internal anti-glare louvre for use in public paths, pedestrian areas, parks or architectural applications. Available for a round or triangular column. Wood effect finish available in addition to many different finishes. Accessories available include an anchorage base. Light performance in accordance with indirect light control emission regulations.



CERTIFICATION	 
IP / IK RATING	IP 65 / IK 10
CLASSIFICATION	class I / II   class II upon request
DIMMABLE	dimnable DALI versione available upon request
BODY	cast aluminium EN AC 44200 high resistance to oxidation
COLUMN	extruded aluminium EN AW 6060 high resistance to oxidation
DIFFUSER	vandal proof clear polycarbonate UV resistant
EXTERNAL FIXINGS	stainless steel A4-70 treated with highly antioxidant water-repellent lubricating solution. The treatment ensures easy opening of the product for maintenance
SEALING GASKET	silicone
WIRING	fixture supplied pre-wired cable 3.3m long H07RN8-F
LIGHT SOURCE	not included (Led integral)
FINISH	powder coating polyester high resistance to UV and oxidation



g@gordonbullard.com
www.bullardbollards.com
269-569-6700





991 South Gull Lake Dr
Richland, MI 49083, USA
1 877-964-464




**BULLARD
BOLLARDS**

Tret Up

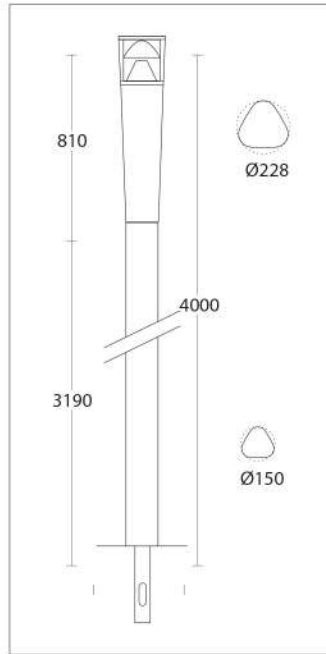

IP65 
DALI
upon
request







plated steel anchorage code

429




colour codes

-  .05 anthracite grey
-  .13 light grey

8284.CDF.A.-- 39 W Led 3000 K 4930 lm
8284.CHF.A.-- 39 W Led 4000 K 5030 lm
 220-240 V 50/60 HZ
 clear polycarbonate
 led driver integral



8284.19F.T.-- 70 W HIT G12 6600 lm
 220-240 V 50/60 HZ
 clear polycarbonate
 conventional ballast integral



g@gordonbullard.com
www.bullardbollards.com
 269-569-6700




991 South Gull Lake Dr
 Richland, MI 49083, USA
 1 877-964-464




**BULLARD
BOLLARDS**

Tret Up

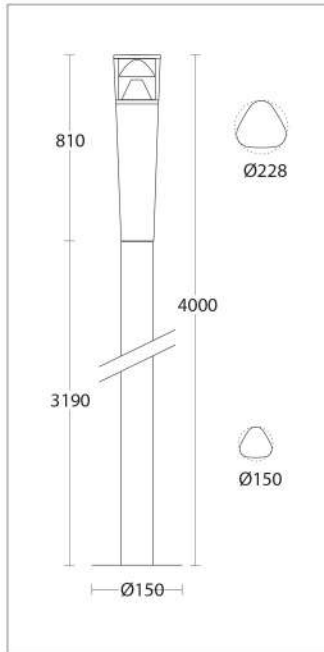

IP65
DALI upon request







plated steel anchorage code

429




colour codes

- .05 anthracite grey
- .13 light grey

8285.CDF.A.-- 39 W Led 3000 K 4930 lm
8285.CHF.A.-- 39 W Led 4000 K 5090 lm
 220-240 V 50/60 HZ
 clear polycarbonate
 led driver integral



8285.19F.T.-- 70 W HIT G12 6600 lm
 220-240 V 50/60 HZ
 clear polycarbonate
 conventional ballast integral



g@gordonbullard.com
www.bullardbollards.com
 269-569-6700




991 South Gull Lake Dr
 Richland, MI 49083, USA
 1 877-964-464



BULLARD BOLLARDS


Tret Up

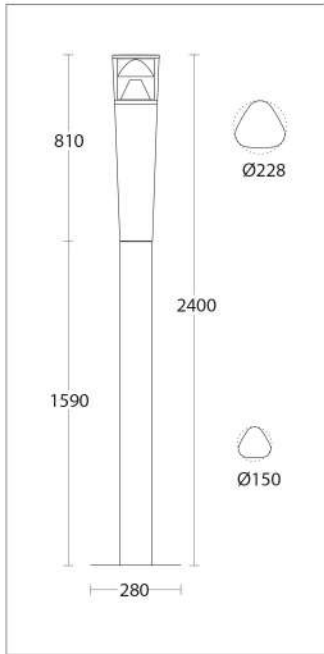

IP65



DALI upon request







plated steel anchorage code

429




colour codes

- .05 anthracite grey
- .13 light grey

8280.CDF.A.-- 39 W Led 3000 K 4930 lm
8280.CHF.A.-- 39 W Led 4000 K 5090 lm
 220-240 V 50/60 HZ
 clear polycarbonate
 led driver integral



8280.19F.T.-- 70 W HIT G12 6600 lm
 220-240 V 50/60 HZ
 clear polycarbonate
 conventional ballast integral



g@gordonbullard.com
www.bullardbollards.com
 269-569-6700



991 South Gull Lake Dr
 Richland, MI 49083, USA
 1 877-964-464