


## PRAGMA OUTDOOR 800

GH1997.FAXT300EN

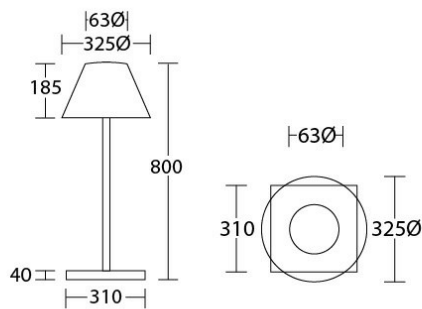

### GENERAL INFORMATION:

Installation Environment	Outdoor, Indoor
Type of Fitting	Free Standing
Place of application	Floor Lights
Application field	Interior & exterior environments, Commercial and architectural applications in the external environment, Private residences, Residences, Resorts.

### CONSTRUCTIVE & DIMENSIONAL:

Construction material	Aluminum
External screws	Stainless steel A4-70 treated with highly antioxidant water-repellent lubricating solution
Diameter	325mm(12,79")
Height	800mm(31,49")

### ELECTRICAL:

Description	1 x 12W LED 3000K CRI>85 1300 lm
Operating Power [V/mA]	110-277V/50-60HZ
Number of heads	1
Number of circuits	1
Driver positioning	Integral
Control gear type	Electronic
Cord Length	5
Emergency kit	not available








### OPTICAL:

Beam type	Table-Floor Lamp
Light distribution	Light distribution diffused
Beam directionability	Fixed
Diffuser material	Polycarbonate
Diffuser finish	Clear
Diffuser temperature [°C]	< 40°C / 104°F

### LIGHT SOURCE:

Light source	LED
Power	12W
ZVEI - LED Type	DOB
Color temperature	3000K
Color rendering index	CRI>85
Nominal LED emission	1300 lm
Light source	Included

### FINISH CODE:

 .01 White (matt)	 .02 Black (matt)	 .19 Light Grey
 .26 Luxury Bronze	 .62 Antique Grey	 .65 Blue
 .80 Sand		

