



Fratto Q 500/800

BODY:

Extruded aluminium body, methacrylate opal diffuser and aluminium upper end cap secured with 4 stainless steel screws.

LIGHT SOURCES:

Fluorescent lamps: 11W TC-SE, 8W and 24W T5 and 13W TC-DE.


POWER SUPPLY:

Integrated electronic control gear.

ACCESSORIES:

Anchoring plate and spike for ground installation.


GENERAL INFORMATION:



IP65



FL TC-SE



Diffuse light

FRATTO Q 500/800

Light source	Wattage	Fitting	mm (H)	kg	Code
FL TC-SE	11W	2G7	500	4,60	76836.___
			800	8,00	76860.___

110-277V / 50-60Hz

Integrated electronic control gear

COLOUR IDENTIFICATION TO BE ADDED TO THE CODE:



68
Grey



79
Corten
finish



86
Anthracite
grey


ACCESSORIES:



Bracket with
anchor bolts code
76839.00



Spike for floor-mounted
installation code
76838.00

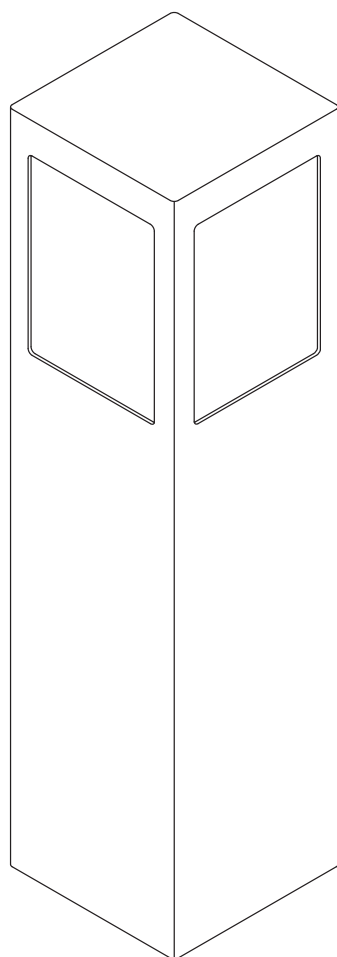

500mm(19,68")/
800mm(31,49")

□ 125mm x 125mm
□ 4,92" x 4,92"