



FRATTO Q 528/800



Fratto Q 800



Fratto Q 528

BODY:

Extruded aluminium body, methacrylate opal diffuser and aluminium upper end cap secured with 4 stainless steel screws.

LIGHT SOURCES:

Fluorescent lamps: 11W TC-SE, 8W and 24W T5 and 13W TC-DE.


POWER SUPPLY:

Integrated electronic control gear.


ACCESSORIES:

Anchoring plate and spike for ground installation.


GENERAL INFORMATION:



IP65



FL T5



Diffuse light

FRATTO Q 528/800

Light source	Wattage	Fitting	mm (H)	kg	Code
FL T5	8W	G5	528	5,30	76835._ _
	24W		800	8,00	76837._ _

110-277V / 50-60Hz

Integrated electronic control gear

COLOUR IDENTIFICATION TO BE ADDED TO THE CODE:



68
Grey



79
Corten
finish



86
Anthracite
grey

ACCESSORIES:




Bracket with
anchor bolts code
76839.00



Spike for floor-mounted
installation code
76838.00

528mm(20,78")/
800mm(31,49")

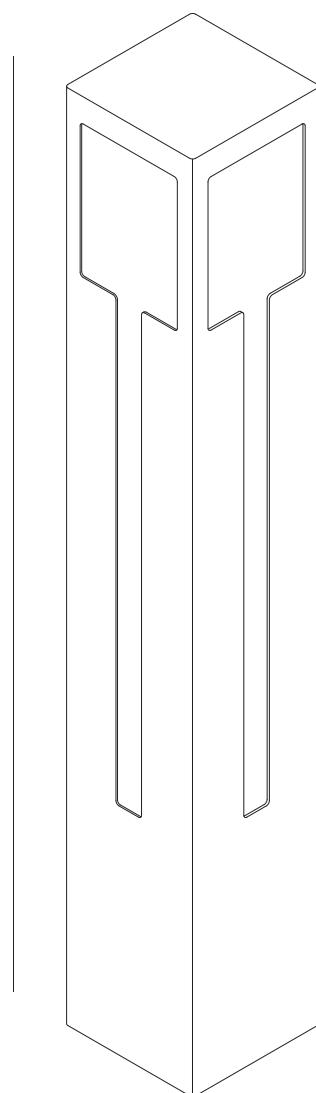

□ 125mm × 125mm
□ 4,92" x 4,92"