

CONSTRUCTIVE & DIMENSIONAL:

Application field:	Walkways, Open spaces, Driveways in residential and public areas
Construction material:	Die-cast aluminum EN AB 44100 highly resistant to oxidation steel
External screws:	Stainless steel A4-70 treated with highly antioxidant water-repellent lubricating solution
Length:	185mm(7,28")
Width:	185mm(7,28")
Height :	500mm(19,68")

ELECTRICAL FOR MODEL:

**GH1349.CGXT300EN
1349.CGX.T**

Description:	1 x 26 W LED 3000 K CRI>90 2967 lm
Operating Power:	110-277 V / 50-60 Hz
Number of heads:	1
Driver positioning:	Integral
Control gear type:	Electronic
Cable entry:	EPDM bushing free of halogens Ø 8/12 mm
Second cable entry:	Available
Emergency kit:	Not available

ELECTRICAL FOR MODEL:

**GH1349.CGXT400EN
1349.CHX.T**

Description:	1 x 26 W LED 4000 K CRI>90 3012 lm
Operating Power:	220-240 V / 50-60 Hz
Number of heads:	1
Driver positioning:	Integral
Control gear type:	Electronic
Cable entry:	EPDM bushing free of halogens Ø 8/12 mm
Second cable entry:	Available
Emergency kit:	Not available


OPTICAL:

Beam type	Bollard 1 light
Beam angle [°]	66°
Light distribution	Symmetric
Beam directionability	Fixed
Diffuser material	Soda-lime tempered glass 3mm
Diffuser finish	Opal

LIGHTING SOURCE:




Light source:	LED
Power:	26 W
LED voltage range:	31.2-36.8V
Current:	700 mA
ZVEI - Led Type:	COB
Color temperature:	3000K for model GH1349.CGXT300EN 1349.CGX.T 4000K for model GH1349.CGXT400EN 1349.CHX.T
Binning:	Step MacAdam 3
Color rendering index:	CRI>90
Nominal LED emission:	2967 lm for model GH1349.CGXT300EN 1349.CGX.T 3012 lm for model GH1349.CGXT400EN 1349.CHX.T
Light source:	Included
Ambient temperature operating range:	-20 °C ÷ +35 °C



FINISH CODE:

 .05 Dark grey (matt)

 .19 Light Grey

ACCESSORIES:

		
Iron anchorage base to be cemented Bivio AC123	IP 68 connector for through wiring AC279	IP 68 fast connector Small AC204

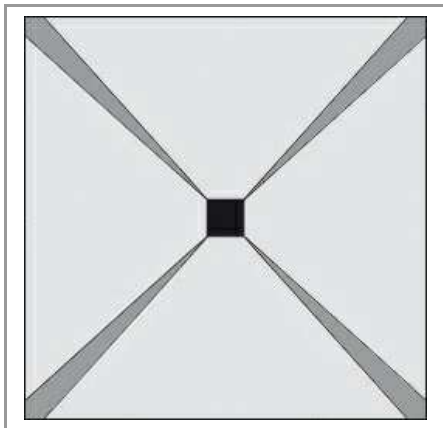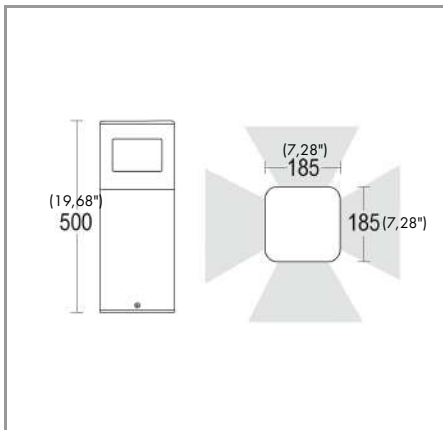

CONSTRUCTIVE & DIMENSIONAL:

Application field:	Walkways, Open spaces, Driveways in residential and public areas
Construction material:	Die-cast aluminum EN AB 44100 highly resistant to oxidation steel
External screws:	Stainless steel A4-70 treated with highly antioxidant water-repellent lubricating solution
Length:	185mm(7,28")
Width:	185mm(7,28")
Height :	500mm(19,68")

ELECTRICAL FOR MODEL:

GH1352.CGXT300EN
1352.CGX.T

Description:	1 x 26 W LED 3000 K CRI>90 2967 lm
Operating Power:	110-277 V / 50-60 Hz
Number of heads:	1
Driver positioning:	Integral
Control gear type:	Electronic
Cable entry:	EPDM bushing free of halogens Ø 8/12 mm
Second cable entry:	Available
Emergency kit:	Not available

ELECTRICAL FOR MODEL:

GH1352.CGXT400EN
1352.CHX.T

Description:	1 x 26 W LED 4000 K CRI>90 3012 lm
Operating Power:	220-240 V / 50-60 Hz
Number of heads:	1
Driver positioning:	Integral
Control gear type:	Electronic
Cable entry:	EPDM bushing free of halogens Ø 8/12 mm
Second cable entry:	Available
Emergency kit:	Not available


OPTICAL:


Beam type	Bollard 4 light
Beam angle [°]	66°
Light distribution	Symmetric
Beam directionability	Fixed
Diffuser material	Soda-lime tempered glass 3mm
Diffuser finish	Opal

LIGHTING SOURCE:




Light source:	LED
Power:	26 W
LED voltage range:	31.2-36.8V
Current:	700 mA
ZVEI - Led Type:	COB
Color temperature:	3000K for model GH1352.CGXT300EN 1352.CGX.T 4000K for model GH1352.CGXT400EN 1352.CHX.T
Binning:	Step MacAdam 3
Color rendering index:	CRI>90
Nominal LED emission:	2967 lm for model GH1352.CGXT300EN 1352.CGX.T 3012 lm for model GH1352.CGXT400EN 1352.CHX.T
Light source:	Included
Ambient temperature operating range:	-20 °C ÷ +35 °C

FINISH CODE:

 .05 Dark grey (matt)

 .19 Light Grey

ACCESSORIES:

		
Iron anchorage base to be cemented Bivio AC123	IP 68 connector for through wiring AC279	IP 68 fast connector Small AC204