



## KEA bollard - single emission H=900mm

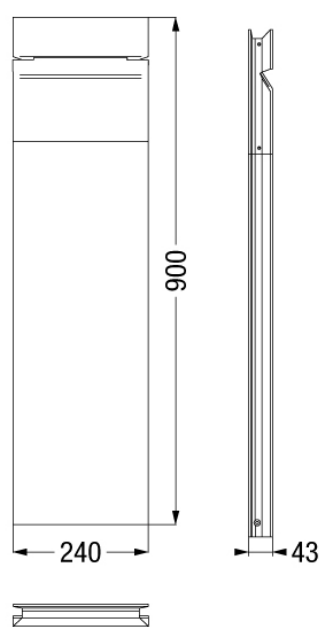

### GENERAL INFORMATION:

Place installation: outdoor  
 Standard colour: GR - graphite satin finish (similar to RAL 7022)  
 Variant colour: DN - embossed white RAL 9003;  
 AL - aluminium grey (similar to RAL 7040)  
 CO - Corten  
 Environments: urban landscape, hallway, residential lighting

### PHYSICAL:

Installation type: low pole/bollard  
 Mounting type: ground surface  
 Painting: Polyester powder coating, with a pluri-processed against corrosion (passed the exposure of over 1500 hours in a saline mist environment).  
 Body: Corrosion resistant extruded aluminium post. Corrosion resistant die-cast aluminium body.

### DIMENSIONS:

A: Total width device: 43mm(1,69")  
 L: Total length device: 240mm(9,44")  
 H: Total height device: 900mm(35,43")  
 Weight: 5,9kg

### OPTICAL SYSTEMS:

Emission: single emission  
 Opening beam: diffused  
 Optical System: Safety tempered glass.

### ELECTRICAL:

Mounting ballast type: Integral  
 Line input: Cable entry: predisposed for daisy chain wiring, internal derivation - terminal block screws 3x2,5mm<sup>2</sup> use only (EN 60598-1) cable type H07RN-F with diameter between 7 and 10mm.  
 Voltage: 110-277V  
 Frequency: 50-60Hz

### MODELS:

Source Type:	Power:	Flux:	K:	Control:	Code:
LED	17,5W	695 lm	4000K CRI>80	Multipower ON-OFF.	D68/B1-84HP-900-GR
LED	17,5W	485 lm	3000K CRI>90	Multipower ON-OFF.	D68/B1-93HP-900-GR
LED	17,5W	695 lm	4000K CRI>80	DALI.	D68/B1-84HP-900-DD-GR
LED	17,5W	485 lm	3000K CRI>90	DALI.	D68/B1-93HP-900-DD-GR

### OPTIONAL ACCESSORY:



Accessory code: D68/B1-TF  
 Technical description: KEA bollard single emission counter plate with stay bolts.