



GENERAL:

Place installation: outdoor AL - aluminium grey (similar to RAL 7040)
 Standard Colour: GR - graphite satin finish (similar to RAL 7022)
 Variant Colour: urban landscape, façades and architectural works,
 Environments hallway
 5000K on request.

Note:

PHYSICAL:

Installation type: low pole/bollard, wall mounted
 Mounting type: ground surface, surface
 Painting: Polyester powder coating, with a pluri-processed against corrosion (passed the exposure of over 1500 hours in a saline mist environment).
 Screws: AISI 304 stainless steel hardware tampering-proof, opened only with a special key.
 Seals: Silicone Rubber.
 Body: Composite high resistance technopolymer fixing base. Corrosion resistant die-cast aluminum body.

DIMENSIONS:



H: Total height: 105mm(4,13")
 D: Total diameter: 145mm(5,70")

OPTICAL SYSTEMS:

Emission: radial
 Opening beam: diffused
 Optical System: Pyrex glass diffuser.

ELECTRICAL:

Mounting ballast type: Integral
 Line input: Complete with pre-wired and tested watertight H07RN-F cable.
 Voltage: 110-277V
 Frequency: 50-60Hz

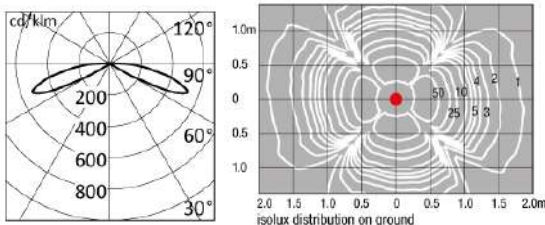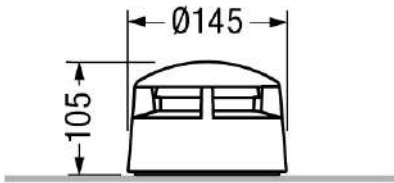

MODELS:

Source Type:	Power:	Flux:	K:	Control:	Code:
LED COB	6W	155.70 lm	4000K	ON-OFF.	D32/MLWN-AL
LED COB	6W	138.40 lm	CRI>80 3000K CRI>80	ON-OFF.	D32/MLWW-AL



OPTIONAL ACCESSORIES ELECTRICAL ONLY FOR CONVENTIONAL CONTROL TYPE MODELS :

Accessory code: ACS/CR1
 Technical description: Fast IP68 connector 1bar (10m-1h) for cable Ø7-12mm - 3x1.5mm.




Accessory code: ACS/CR6
 Technical description: 4 ways IP68 wiring box for cable Ø5-14mm - 3x1,5mm.




OPTIONAL ACCESSORIES MOUNTING:

Accessory code: D32/P
 Technical description: Ground recessed pit. The D32/P accessory, designed to be embedded in the ground, works as a support and fixing base creating also the necessary room and the electrical shunt connection to the feeding line.
 Built-in depth: 110mm(4,33")



OPTIONAL ACCESSORIES OPTICAL AND STRUCTURAL:



Accessory code: D32/SO
 Technical description: Darkening shield size 90° wide. The use of one or two darkening sectors makes possible to have different light effects. Without using the quadrants the light is emitted radially at 360°. N.B. max 2 pieces per unit.



Accessory code: FE0552
 Technical description: Opening key.