

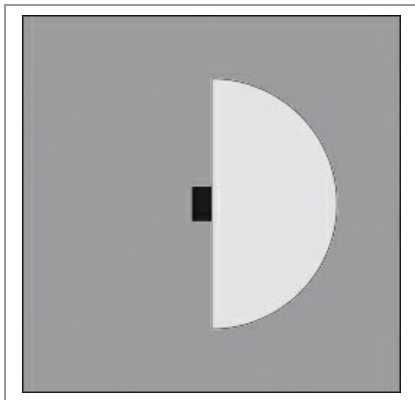


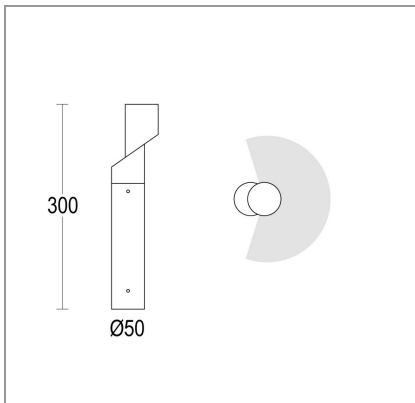

CONSTRUCTIVE & DIMENSIONAL:

Application field: Walkways and driveways, Passageways, Cycle paths, Gardens
 Construction material: Extruded aluminum EN AW-6063 T5 / die-casting aluminum EN-AB 44100
 Diameter: 50mm(1,96")
 Height : 300mm(11,81")

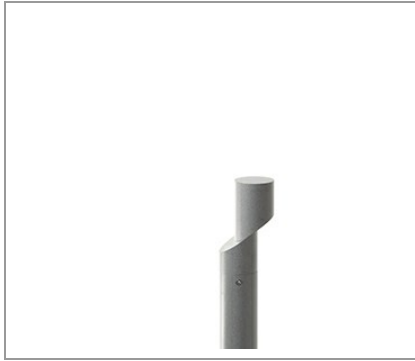

ELECTRICAL and LIGHTING SOURCE for MODEL:

GH1250.AHXA300EN
GH1250.AHX.A

Description: 1 x 6 W LED 3000 K CRI>90 845 lm
 Operating Power: 110-277 V / 50-60 Hz
 Number of heads: 1
 Number of Circuits: 1
 Driver positioning: Integral
 Control gear type: Electronic
 Emergency kit: Not available
 Light source: LED
 Power: 6 W
 LED voltage range: 18V
 Current: 350 mA
 ZVEI - Led Type: COB
 Color temperature: 3000 K
 Binning: Step MacAdam 3
 Color rendering index: CRI>90
 Nominal LED emission: 845 lm
 Light source: Included
 Ambient temperature operating range: -20 °C ÷ +35 °C

ELECTRICAL and LIGHTING SOURCE for MODEL:

GH1250.AHXA400EN

Description: 1 x 6 W LED 4000 K CRI>90 877 lm
 Operating Power: 110-277 V / 50-60 Hz
 Number of heads: 1
 Number of Circuits: 1
 Driver positioning: Integral
 Control gear type: Electronic
 Emergency kit: Not available
 Light source: LED
 Power: 6 W
 LED voltage range: 18V
 Current: 350 mA
 ZVEI - Led Type: COB
 Color temperature: 4000 K
 Binning: Step MacAdam 3
 Color rendering index: CRI>90
 Nominal LED emission: 877 lm
 Light source: Included
 Ambient temperature operating range: -20 °C ÷ +35 °C


OPTICAL:

Beam type: Bollard [180° emission]
 Light distribution: Asymmetric
 Beam directionability: Fixed

FINISH CODE:

.05 Dark grey (matt) .19 Light Grey

ACCESSORIES:



IP 68 connector for through wiring AC279




IP 68 fast connector Small AC204




Plated steel anchorage code Minizac AC238

H(m)	φ(m)	Lux Medi
5	6.8	0
4	5.5	0
3	4.1	0
2	2.7	0
1	1.4	0



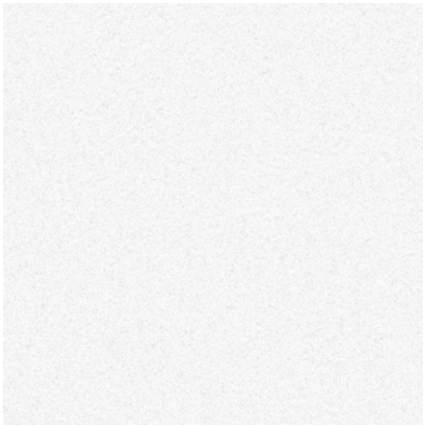


.01 WHITE

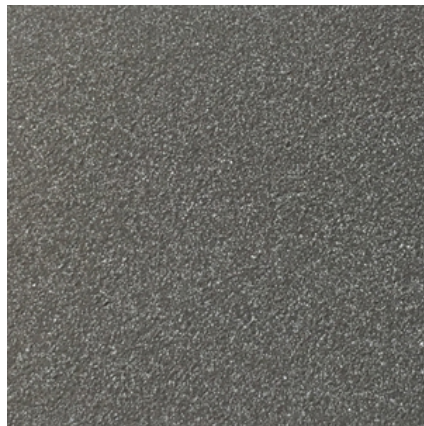


.05 ANTHRACITE GREY



.19 LIGHT GREY

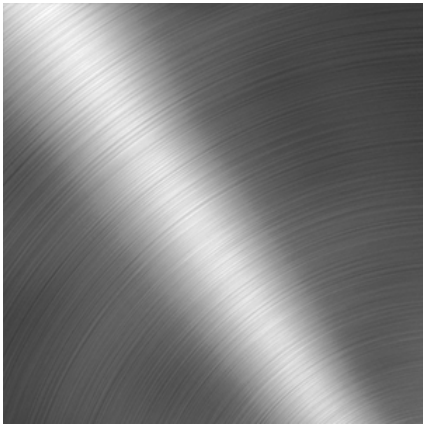

.15 STAINLESS STEEL

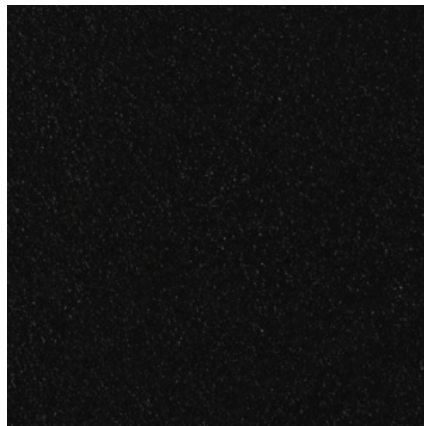

.02 BLACK



.32 OAK EFFECT



.45 RUST



.34 GLASS



.43 CONCRETE EFFECT