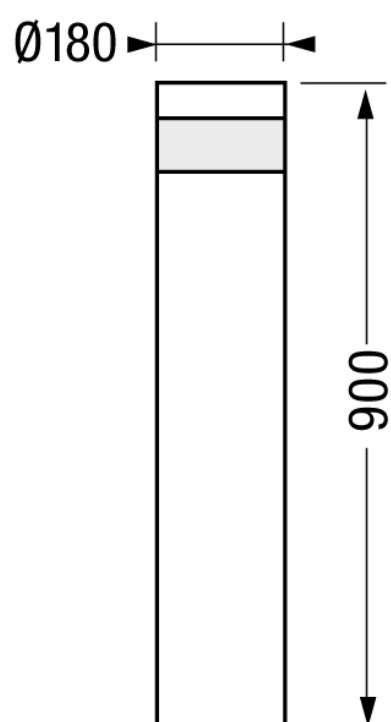


GENERAL INFORMATION:

Place installation:	outdoor
Standard colour:	AL - aluminium grey (similar to RAL 7040)
Variant colour:	GR - graphite satin finish (similar to RAL 7022)
Environments:	urban landscape, hallway, residential lighting
Note:	5000K on request. DALI version on request.

PHYSICAL:

Installation type:	low pole/bollard
Mounting type:	ground surface
Mounting note:	supplied complete with a kit of bolts for ground anchoring.
Painting:	Polyester powder coating, with a pluri-processed against corrosion (passed the exposure of over 1500 hours in a saline mist environment).
Screws:	AISI 304 stainless steel screws.
Seals:	EPDM and Silicone Rubber Gaskets.
Body:	Corrosion resistant extruded aluminium post. Corrosion resistant die-cast aluminium body. Corrosion resistant aluminium ground fixing base.


DIMENSIONS:


H: Total height device	900mm(35,43")
D: Total diameter device	180mm(7,08")

OPTICAL SYSTEMS:

Opening beam:	diffused
Optical System:	Unbreakable anti UV polycarbonate diffusers

ELECTRICAL:

Mounting ballast type:	Integral
Line input:	Internal looping facility 3x4mm ² terminal, use only (EN 60598-1) cable type H07RN-F with diameter between 7,5 and 12mm.
Voltage:	110-277V
Frequency:	50-60Hz

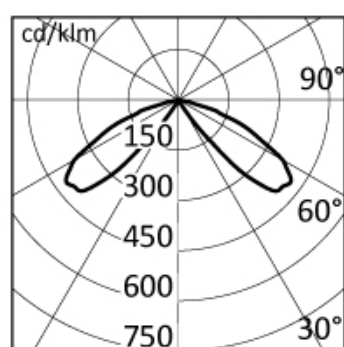

MODELS:

Source Type:	Power:	Flux:	K:	Control:	Code:
LED COB	25W	1188 lm	4000K CRI>80	ON-OFF.	D53/T290-LWN-AL
LED COB	25W	1122 lm	3000K CRI>90	ON-OFF.	D53/T290-LWW-AL
LED COB	25W	1188 lm	4000K CRI>80	DALI.	D53/T290-LWN-DD-AL
LED COB	25W	1122 lm	3000K CRI>90	DALI.	D53/T290-LWW-DD-AL

MOUNTING:



Accessory code:	D53/2-TF
Technical description:	For models D53 polo/T2 and D58 box/B2. Counter plate with stay bolts.
Built-in depth:	140mm

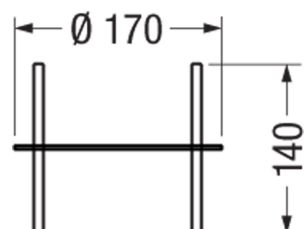

OPTICAL:



Accessory code:	D53/T2-SO
Technical description:	Darkening sector -180° wide.

ELECTRICAL:



Accessory code:	AE/1530
Technical description:	4 ways IP68 connector for cable Ø6,5-12mm - 3x2,5mm.