



## MINIMIGNON OUTDOOR WALL

### CONSTRUCTIVE & DIMENSIONAL:

Application field:	Porch, balconies & terraces, Passageways, Pathios, Covered entrances & walkways, Walkways and driveways
Construction material:	Extruded aluminum EN AW-6063 T5 / die-casting alluminum EN-AB 44100
External screws:	Stainless steel A4-70 treated with highly antioxidant water-repellent lubricating solution
Width:	280mm(11,02")
Height:	255mm(10,03")

### ELECTRICAL and LIGHTING SOURCE for MODEL: GH1212.NMXX0300EN 1212.MEX.A

Description:	1 x 44 W LED 3000 K CRI>85 5688 lm
Operating Power:	110-277 V / 50-60 Hz
Number of heads:	1
Number of circuits:	1
Driver positioning:	Integral
Control gear type:	Electronic
Cable entry:	Metal cable gland M16 Ø 5/10 mm
Emergency kit:	Not available
Light source:	LED
Power:	44W
ZVEI - Led Type:	LED module
Color temperature:	3000 K
Color rendering index:	CRI>85
Nominal LED emission:	5688 lm
Light source:	Included
Ambient temperature operating range:	- 20 °C ÷ +35 °C

### ELECTRICAL and LIGHTING SOURCE for MODEL: GH1212.NMXX0400EN 1212.MFX.A



Description:	1 x 44 W LED 4000 K CRI>85 6344 lm
Operating Power:	110-277 V / 50-60 Hz
Number of heads:	1
Number of circuits:	1
Driver positioning:	Integral
Control gear type:	Electronic
Cable entry:	Metal cable gland M16 Ø 5/10 mm
Emergency kit:	Not available
Light source:	LED
Power:	44W
ZVEI - Led Type:	LED module
Color temperature:	4000 K
Color rendering index:	CRI>85
Nominal LED emission:	6344lm
Light source:	Included
Ambient temperature operating range:	- 20 °C ÷ +35 °C

### OPTICAL:

Beam Type:	Wall-Effect 1 [60°-120°] extra wide
Light distribution:	Symmetric
Beam directionability:	Fixed
Diffuser material:	Soda-lime tempered glass 10mm
Diffuser finish:	Opal
Reflector material:	Aluminum with super pure aluminum high vacuum deposit 99.5%
Reflector finish:	Aluminum

### FINISH CODE:

■ .05 Dark grey (matt)	■ .19 Light Grey
------------------------	------------------

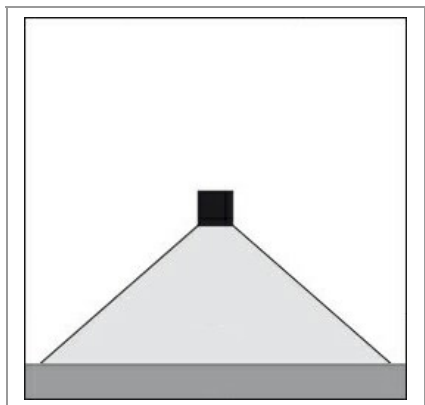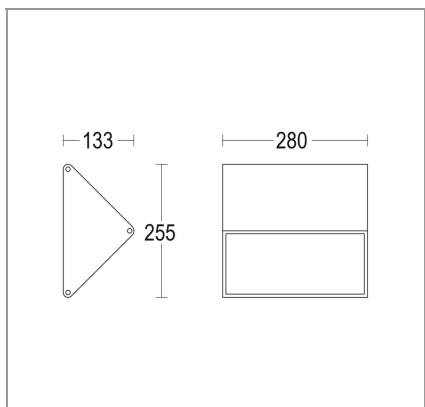

H(m)	φ(m)	Lux Medi
5	72.5	2
4	58.0	4
3	43.5	6
2	29.0	14
1	14.5	58

