

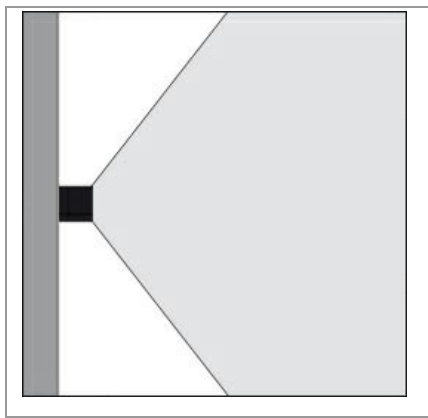


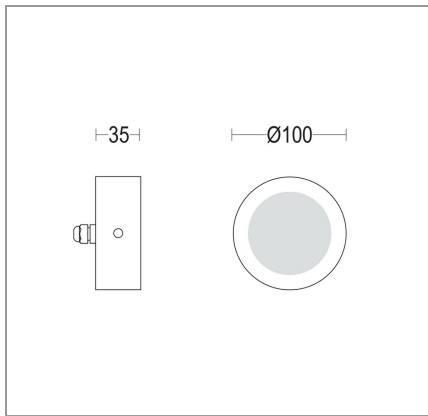

MICROSPIA FLAT CEILING 100

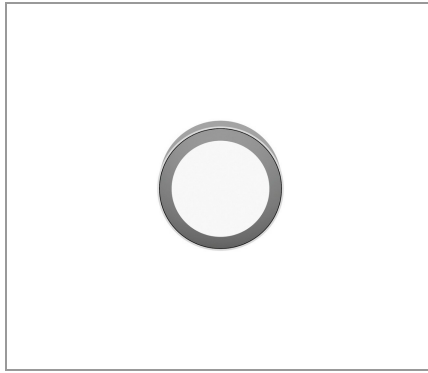

GH1385.CAXO300EN
1385.CAX.O

GH1385.CAXO400EN
1385.CBX.O

H(m)	φ(m)	Lux Medi
5	15.2	1
4	12.2	1
3	9.1	2
2	6.1	5
1	3.0	21

H(m)	φ(m)	Lux Medi
5	15.2	1
4	12.2	1
3	9.1	3
2	6.1	6
1	3.0	23

CONSTRUCTIVE & DIMENSIONAL:

Application field:	Stair steps, Passageways, Ramps, Walkways and driveways
External screws:	Stainless steel A4-70 treated with highly antioxidant water-repellent lubricating solution
Diameter:	100mm(3,93")
Height:	35mm(1,37")

ELECTRICAL and LIGHTING SOURCE for MODEL: GH1385.CAXO300EN 1385.CAX.O

Description:	1 x 7 W LED 3000 K CRI>85 900 lm
Operating Power:	110-277 V / 50-60 Hz
Number of heads:	1
Number of circuits:	1
Driver positioning:	Integral
Control gear type:	Electronic
Cable entry:	Fixture supplied with pre-wired cable H05RN-F
Cord length:	0,5m
Water-Lock system:	Included
Emergency kit:	Not available
Light source:	LED
Power:	7 W
ZVEI - Led Type:	DOB
Color temperature:	3000 K
Color rendering index:	CRI>85
Nominal LED emission:	900 lm
Light source:	Included
Ambient temperature operating range:	- 20 °C ÷ +35 °C

ELECTRICAL and LIGHTING SOURCE for MODEL: GH1385.CAXO400EN 1385.CBX.O

Description:	1 x 7 W LED 4000 K CRI>85 1000 lm
Operating Power:	110-277 V / 50-60 Hz
Number of heads:	1
Number of circuits:	1
Driver positioning:	Integral
Control gear type:	Electronic
Cable entry:	Fixture supplied with pre-wired cable H05RN-F
Cord length:	0,5m
Water-Lock system:	Included
Emergency kit:	Not available
Light source:	LED
Power:	7 W
ZVEI - Led Type:	DOB
Color temperature:	4000 K
Color rendering index:	CRI>85
Nominal LED emission:	1000 lm
Light source:	Included
Ambient temperature operating range:	- 20 °C ÷ +35 °C

OPTICAL:

Beam Type:	Ceiling extrawide
Light distribution:	Symmetric
Beam directionability:	Fixed
Diffuser material:	Soda-lime tempered glass 5mm
Diffuser finish:	Opal
Diffuser temperature:	< 40 °C / 104 °F

FINISH CODE:

■ .05 Dark grey (matt)	■ .19 Light Grey
------------------------	------------------

NOTE:

Dimmable trailing edge