

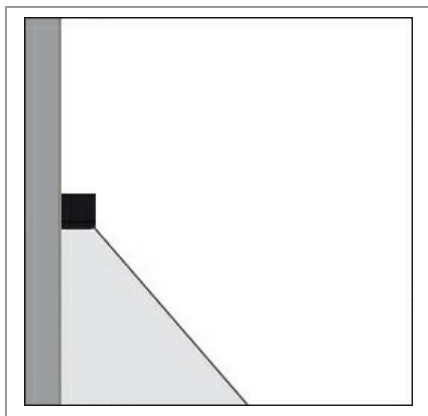


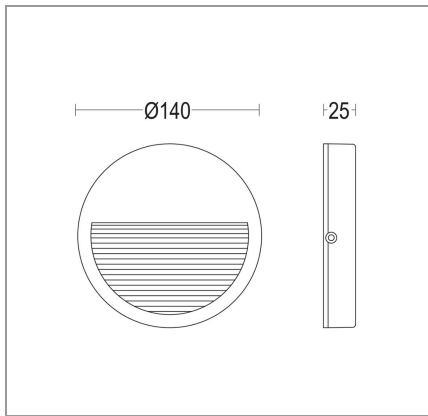

MINIVERSO FLAT RD 140

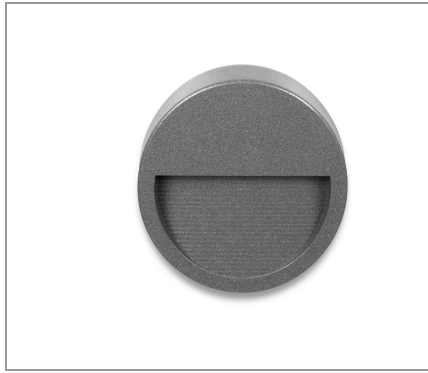

H(m)	φ(m)	Lux Medi
5	0.0	0
4	0.0	0
3	0.0	0
2	0.0	0
1	0.0	0

CONSTRUCTIVE & DIMENSIONAL:

Application field: Stair steps, Passageways, Ramps, Walkways and driveways
 Construction material: Die-cast aluminum EN AB 44100 highly resistant to oxidation
 External screws: Stainless steel A4-70 treated with highly antioxidant water-repellent lubricating solution
 Diameter: 140mm(5,51")
 Height: 26mm(1,02")

ELECTRICAL and LIGHTING SOURCE for MODEL: GH1392.BGXP300EN 1392.FKX.P

Description: 1 x 4 W LED 3000 K CRI>90 544 lm
 Operating Power: 110-277 V / 50-60 Hz
 Number of heads: 1
 Number of circuits: 1
 Driver positioning: Integral
 Control gear type: Electronic
 Cable entry: Silicone bushing Ø 10/14 mm
 Emergency kit: Not available
 Light source: LED
 Power: 4 W
 LED voltage range: 6V
 Courrent: 350 mA
 ZVEI - Led Type: LED
 Color temperature: 3000 K
 Binning: Step MacAdam 3
 Color rendering index: CRI>90
 Nominal LED emission: 544 lm
 Light source: Included
 Ambient temperature operating range: - 20 °C ÷ +35 °C

ELECTRICAL and LIGHTING SOURCE for MODEL: GH1392.BGXP400EN 1392.FZX.P

Description: 1 x 4 W LED 4000 K CRI>90 576 lm
 Operating Power: 110-277 V / 50-60 Hz
 Number of heads: 1
 Number of circuits: 1
 Driver positioning: Integral
 Control gear type: Electronic
 Cable entry: Silicone bushing Ø 10/14 mm
 Emergency kit: Not available
 Light source: LED
 Power: 4 W
 LED voltage range: 6V
 Courrent: 350 mA
 ZVEI - Led Type: LED
 Color temperature: 4000 K
 Binning: Step MacAdam 3
 Color rendering index: CRI>90
 Nominal LED emission: 576 lm
 Light source: Included
 Ambient temperature operating range: - 20 °C ÷ +35 °C

OPTICAL:

Beam Type: Wall asymmetric downlight
 Light distribution: Asymmetric
 Beam directionability: Fixed
 Diffuser material: Soda-lime tempered glass 3mm
 Diffuser finish: Micro-prism
 Diffuser temperature: < 30 °C / 86 °F

FINISH CODE:

■ .05 Dark grey (matt) ■ .19 Light Grey

NOTE:

All models not dimmable

