




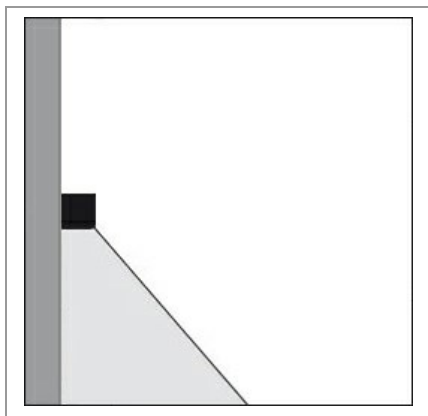

## MINIVERSO FLAT SQ 120

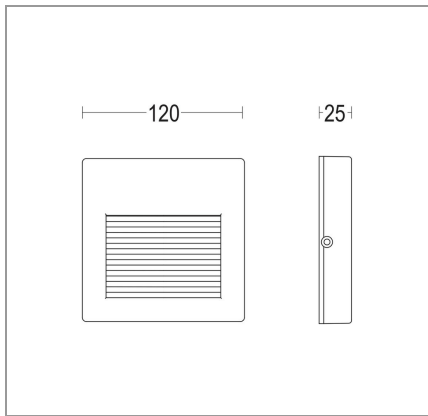

H(m)	φ(m)	Lux Medi
5	0.0	0
4	0.0	0
3	0.0	0
2	0.0	0
1	0.0	0

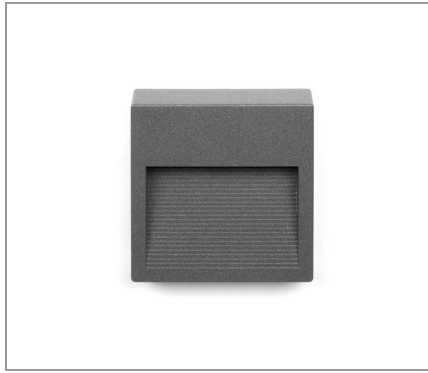

### CONSTRUCTIVE & DIMENSIONAL:

Application field:	Stair steps, Passageways, Ramps, Walkways and driveways
Construction material:	Die-cast aluminum EN AB 44100 highly resistant to oxidation
External screws:	Stainless steel A4-70 treated with highly antioxidant water-repellent lubricating solution
Length:	120mm(4,72")
Width:	120mm(4,72")
Height :	25mm(0,98")

### ELECTRICAL and LIGHTING SOURCE for MODEL: GH1136.BGXP300EN 1136.ETX.P

Description:	1 x 2.9 W LED 3000 K CRI>90 367 lm
Operating Power:	1 10-277 V / 50-60 Hz
Number of heads:	1
Number of circuits:	1
Driver positioning:	Integral
Control gear type:	Electronic
Cable entry:	Silicone bushing Ø 10/14 mm
Emergency kit:	Not available
Light source:	LED
Power:	2.9 W
LED voltage range:	6V
Current:	500 mA
ZVEI - Led Type:	LED
Color temperature:	3000 K
Binning:	Step MacAdam 3
Color rendering index:	CRI>90
Nominal LED emission:	367 lm
Light source:	Included
Ambient temperature operating range:	- 20 °C ÷ +35 °C

### ELECTRICAL and LIGHTING SOURCE for MODEL: GH1136.BGXP400EN 1136.EVX.P

Description:	1 x 2.9 W LED 4000 K CRI>90 389 lm
Operating Power:	1 10-277 V / 50-60 Hz
Number of heads:	1
Number of circuits:	1
Driver positioning:	Integral
Control gear type:	Electronic
Cable entry:	Silicone bushing Ø 10/14 mm
Emergency kit:	Not available
Light source:	LED
Power:	2.9 W
LED voltage range:	6V
Current:	500 mA
ZVEI - Led Type:	LED
Color temperature:	4000 K
Binning:	Step MacAdam 3
Color rendering index:	CRI>90
Nominal LED emission:	389 lm
Light source:	Included
Ambient temperature operating range:	- 20 °C ÷ +35 °C

### OPTICAL:

Beam Type:	Wall asymmetric downlight
Light distribution:	Asymmetric
Beam directionability:	Fixed
Diffuser material:	Soda-lime tempered glass 3mm
Diffuser finish:	Micro-prism
Diffuser temperature:	< 30 °C / 86 °F

### FINISH CODE:

■ .05 Dark grey (matt)	■ .19 Light Grey
------------------------	------------------

### NOTE:

All models not dimmable