


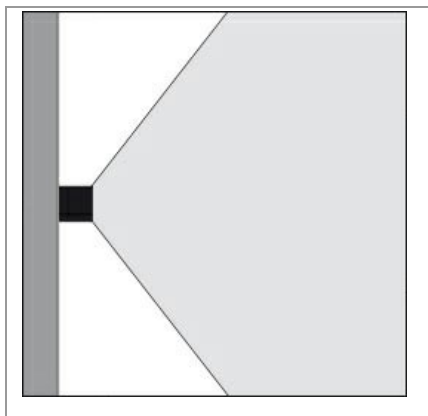


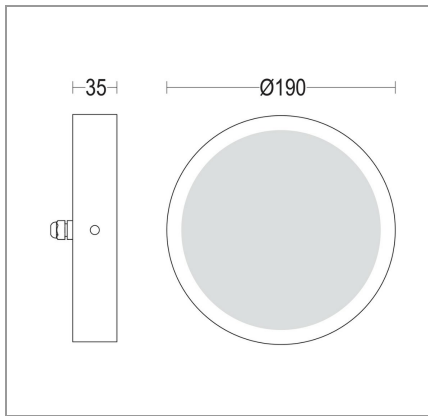

## SPIA FLAT CEILING 190

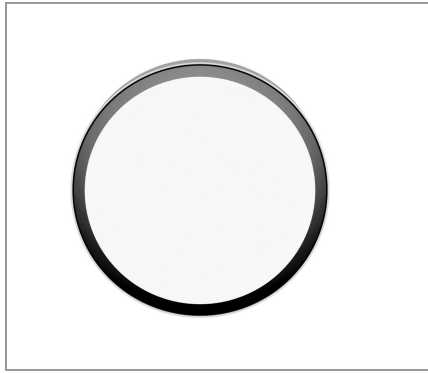

GH1387.FG XO300EN  
1387.HEX.O

GH1387.FG XO400EN  
1387.HFX.O

H(m)	φ(m)	Lux Medi
5	15.2	2
4	12.2	3
3	9.1	5
2	6.1	10
1	3.0	41

H(m)	φ(m)	Lux Medi
5	15.2	2
4	12.2	3
3	9.1	5
2	6.1	11
1	3.0	44

### CONSTRUCTIVE & DIMENSIONAL:

Application field: Stair steps, Passageways, Ramps, Walkways and driveways  
 External screws: Stainless steel A4-70 treated with highly antioxidant water-repellent lubricating solution  
 Diameter: 190mm(7,48")  
 Height: 35mm(1,37")

### ELECTRICAL and LIGHTING SOURCE for MODEL: GH1387.FG XO300EN 1387.HEX.O

Description: 1 x 15 W LED 3000 K CRI>85 1800 lm  
 Operating Power: 110-277 V / 50-60 Hz  
 Number of heads: 1  
 Number of circuits: 1  
 Driver positioning: Integral  
 Control gear type: Electronic  
 Cable entry: Fixture supplied with pre-wired cable H05RN-F  
 Cord length: 0,5m  
 Water-Lock system: Included  
 Emergency kit: Not available  
 Light source: LED  
 Power: 15 W  
 ZVEI - Led Type: DOB  
 Color temperature: 3000 K  
 Color rendering index: CRI>85  
 Nominal LED emission: 1800 lm  
 Light source: Included  
 Ambient temperature operating range: - 20 °C ÷ +35 °C

### ELECTRICAL and LIGHTING SOURCE for MODEL: GH1387.FG XO400EN 1387.HFX.O

Description: 1 x 15 W LED 4000 K CRI>85 1900 lm  
 Operating Power: 110-277 V / 50-60 Hz  
 Number of heads: 1  
 Number of circuits: 1  
 Driver positioning: Integral  
 Control gear type: Electronic  
 Cable entry: Fixture supplied with pre-wired cable H05RN-F  
 Cord length: 0,5m  
 Water-Lock system: Included  
 Emergency kit: Not available  
 Light source: LED  
 Power: 15 W  
 ZVEI - Led Type: DOB  
 Color temperature: 4000 K  
 Color rendering index: CRI>85  
 Nominal LED emission: 1900 lm  
 Light source: Included  
 Ambient temperature operating range: - 20 °C ÷ +35 °C

### OPTICAL:

Beam Type: Ceiling extrawide  
 Light distribution: Symmetric  
 Beam directionability: Fixed  
 Diffuser material: Soda-lime tempered glass 5mm  
 Diffuser finish: Opal  
 Diffuser temperature: < 40 °C / 104 °F

### FINISH CODE:

■ .05 Dark grey (matt)      ■ .19 Light Grey

### NOTE:

Dimmable trailing edge