



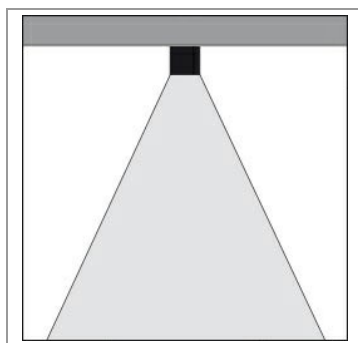

TORRE FLAT CEILING 200

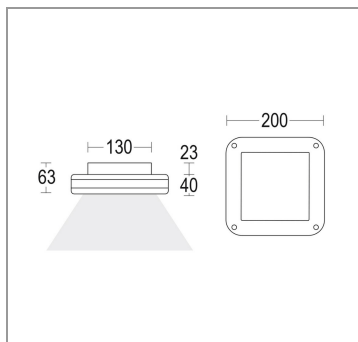

GH1210.BUFT400EN
1210.FHF.T

GH1210.BUFT300EN
1210.FGF.T

H(m)	φ(m)	Lux Medi
5	4.2	44
4	3.3	68
3	2.5	121
2	1.7	273
1	0.8	1093

H(m)	φ(m)	Lux Medi
5	4.2	43
4	3.3	67
3	2.5	120
2	1.7	269
1	0.8	1077

CONSTRUCTIVE & DIMENSIONAL:

Application field:	Covered entrances & walkways, Porch, balconies & terraces
Construction material:	Extruded aluminum EN AW-6063 T5 - EN-AB 44100
External screws:	Stainless steel A4-70 treated with highly antioxidant water-repellent lubricating solution
Length:	200mm(7,87")
Width:	200mm(7,87")
Height:	63mm(2,48")

ELECTRICAL and LIGHTING SOURCE for MODEL: GH1210.BUFT400EN 1210.FHF.T

Description:	1 x 19 W LED 4000 K CRI>90 2410 lm
Operating Power:	110-277 V / 50-60 Hz
Number of heads:	1
Driver positioning:	Integral
Control gear type:	Electronic
Cable entry:	IP67 cable gland
Emergency kit:	Not available
Light source:	LED
Power:	19 W
LED voltage range:	31.2-36.8V
Current:	550 mA
ZVEI - Led Type:	COB
Color temperature:	4000 K
Binning:	Step MacAdam 3
Color rendering index:	CRI>90
Nominal LED emission:	2410 lm
Light source:	Included
Ambient temperature operating range:	- 20 °C ÷ +35 °C

ELECTRICAL and LIGHTING SOURCE for MODEL: GH1210.BUFT300EN 1210.FGF.T

Description:	1 x 19 W LED 3000 K CRI>90 2374 lm
Operating Power:	110-277 V / 50-60 Hz
Number of heads:	1
Driver positioning:	Integral
Control gear type:	Electronic
Cable entry:	IP67 cable gland
Emergency kit:	Not available
Light source:	LED
Power:	19 W
LED voltage range:	31.2-36.8V
Current:	550 mA
ZVEI - Led Type:	COB
Color temperature:	3000 K
Binning:	Step MacAdam 3
Color rendering index:	CRI>90
Nominal LED emission:	2374 lm
Light source:	Included
Ambient temperature operating range:	- 20 °C ÷ +35 °C

OPTICAL:

Beam Type:	Ceiling downlight [41°-60°] wide
Beam angle:	45°
Light distribution:	Symmetric
Beam directionability:	Fixed
Diffuser material:	Soda-lime tempered glass 4mm
Diffuser finish:	Clear
Reflector material:	PMMA lens

FINISH CODE:

■ .05 Dark grey (matt)

■ .19 Light Grey

ACCESSORIES:

— 68 —



IP 68 fast
connector Small
AC204