


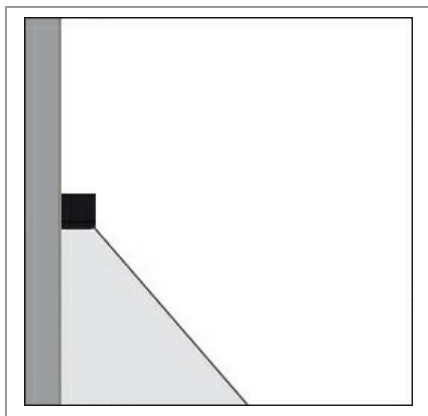


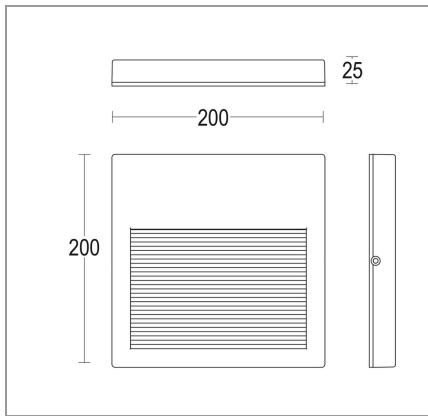

VERSO FLAT SQ 200

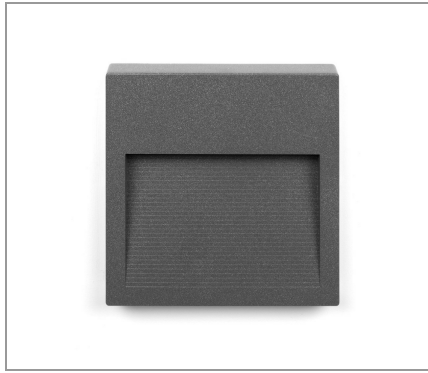

H(m)	φ(m)	Lux Medi
5	0.0	0
4	0.0	0
3	0.0	0
2	0.0	0
1	0.0	0



CONSTRUCTIVE & DIMENSIONAL:

Application field:	Stair steps, Passageways, Ramps, Walkways and driveways
Construction material:	Die-cast aluminum EN AB 44100 highly resistant to oxidation
External screws:	Stainless steel A4-70 treated with highly antioxidant water-repellent lubricating solution
Length:	200mm(7,87")
Width:	200mm(7,87")
Height :	25mm(0,98")

ELECTRICAL and LIGHTING SOURCE for MODEL: GH1137.CAXP300EN 1137.FGX.P

Description:	1 x 8.7 W LED 3000 K CRI>90 1101 lm
Operating Power:	110-277 V / 50-60 Hz
Number of heads:	1
Number of circuits:	1
Driver positioning:	Integral
Control gear type:	Electronic
Cable entry:	Silicone bushing Ø 10/14 mm
Emergency kit:	Not available
Light source:	LED
Power:	8.7 W
LED voltage range:	6V
Current:	500 mA
ZVEI - Led Type:	LED
Color temperature:	3000 K
Binning:	Step MacAdam 3
Color rendering index:	CRI>90
Nominal LED emission:	1101 lm
Light source:	Included
Ambient temperature operating range:	- 20 °C ÷ +35 °C

ELECTRICAL and LIGHTING SOURCE for MODEL: GH1137.CAXP400EN 1137.FHX.P

Description:	1 x 8.7 W LED 4000 K CRI>90 1167 lm
Operating Power:	110-277 V / 50-60 Hz
Number of heads:	1
Number of circuits:	1
Driver positioning:	Integral
Control gear type:	Electronic
Cable entry:	Silicone bushing Ø 10/14 mm
Emergency kit:	Not available
Light source:	LED
Power:	8.7 W
LED voltage range:	6V
Current:	500 mA
ZVEI - Led Type:	LED
Color temperature:	4000 K
Binning:	Step MacAdam 3
Color rendering index:	CRI>90
Nominal LED emission:	1167 lm
Light source:	Included
Ambient temperature operating range:	- 20 °C ÷ +35 °C

OPTICAL:

Beam Type:	Wall asymmetric downlight
Light distribution:	Asymmetric
Beam directionability:	Fixed
Diffuser material:	Soda-lime tempered glass 3mm
Diffuser finish:	Micro-prism
Diffuser temperature:	< 30 °C / 86 °F

FINISH CODE:

■ .05 Dark grey (matt)	■ .19 Light Grey
------------------------	------------------

NOTE:

All models not dimmable