


GLOBO 60







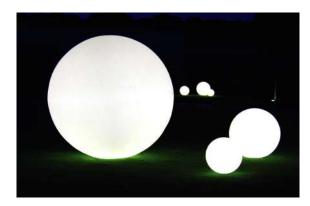





Floor lamp

Year of production: 2000


Versions: lighting. Material: Polyethylene.

Cable color: Black

Dimensions: Ø 60 cm(23,62")

Weight: 4,7 Kg

Packaging: 61 x 61 x 61 cm Packaging volume: 0,227 m3

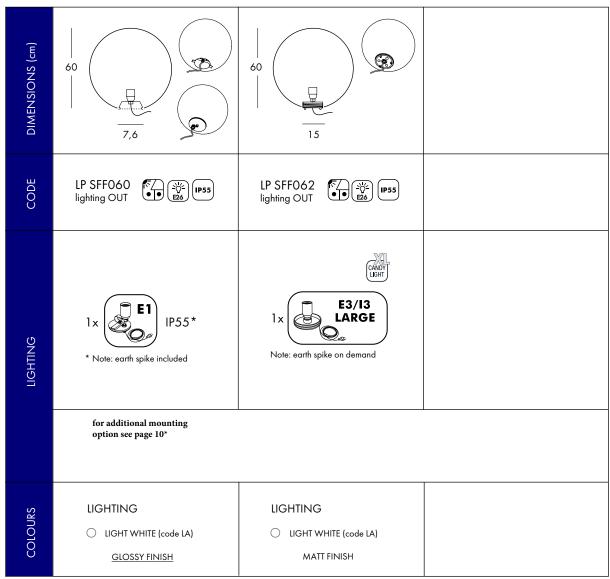

WE WELCOME ALL CUSTOM ORDERS! IES files upon Request

sales@gordonbullard.com www.bullardbollards.com 1-877-964-4646



991 South Gull Lake Dr Richland, MI 49083




GLOBO COMPONENTS







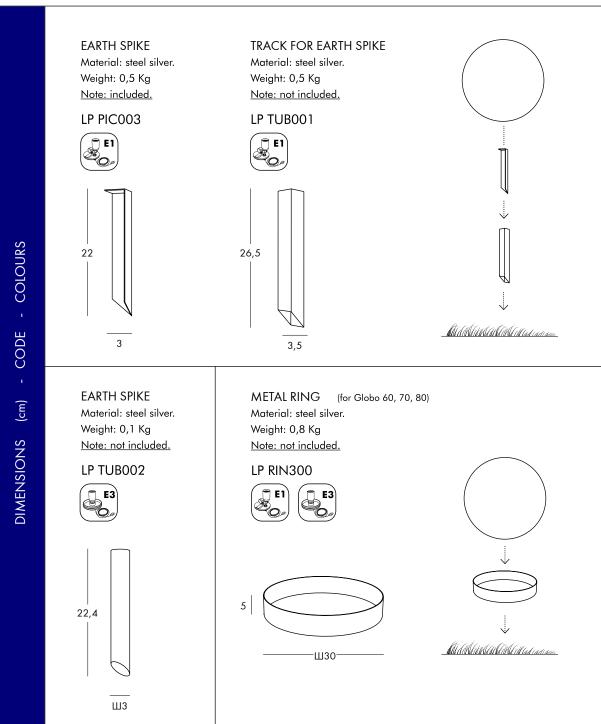

sales@gordonbullard.com www.bullardbollards.com 1-877-964-4646




991 South Gull Lake Dr Richland, MI 49083 US USA




ADDITIONAL MOUNTING OPTIONS


.KB Cement anchor bolts

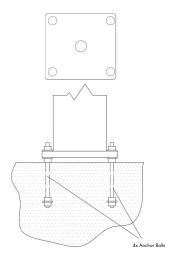


.OG Ground stake



.AF Plate with screws

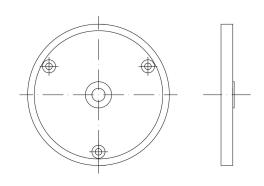

.QR Pole mounting +(one of 3 other options)



pipe diameter 3" for GLOBO: 30CM/40/60CM/ 80CM

pipe diameter 6" for GLOBO: 120CM/200CM

Note*: Custom Sizes of Pole on request starting from 3 inches

WE WELCOME ALL CUSTOM ORDERS!

IES files upon Request

sales@gordonbullard.com www.bullardbollards.com 1-877-964-4646 C



991 South Gull Lake Dr Richland, MI 49083 US USA



For indoor use.



Stackable item.



For indoor and outdoor use.



100% recyclable polyethylene.




Recycling and disposal of electronic waste (WEEE).



Outdoor version on red P65.)

LIGHTING SYMBOLS





RGB lighting system.



Protected against the intrusion of solid objects $\mathbb{M} > 1$ mm and splashing water.

Lamp base for G4 halogen bulb.



Item compatible with Candy Light.



Protected against the intrusion of dust \(\frac{\frac{1}{\omega_0}}{\omega_0} \) Lamp base for GU10 spotlight.





Insulation class 1.



Fully protected against the intrusion o dust and immersion in water.



Lamp base for G13 neanNutreen



Insulation class 2.



Small lamp base for E14 - 14 mm light bulb.



tube lighting system.



Insulation class 3.



Medium lamp base for E26 - 26 mm (♣ LED technology lighting system. light bulb.





Device proper to direct assembly onto normally inflammable surfaces.



Lighting through energy saving bulb.

The upper figure shows the number of allowed bulbs. The lower figure shows the MAXIMUM recommended power



Lighting through energy saving fluorescent spotlight. The upper figure shows the number of allowed spotlights. The lower figure shows the MAXIMUM recommended power.



Lighting through neon tube.

The upper figure shows the number of allowed neon tubes The lower figure shows the MAXIMUM recommended power



Lighting through energy saving globe bulb.

The upper figure shows the number of allowed bulbs.

The lower figure shows the MAXIMUM recommended power.



Lighting through flexible LED tube.

The lower figure shows the MAXIMUM recommended



Lighting through circular T9 neon tube.

The upper figure shows the number of allowed neon tubes.

The lower figure shows the MAXIMUM recommended power.

WIRING SYMBOLS



Wiring with metal clamp.

IP20 protection.

Diameter 11 cm.



Wiring with special base for KIT LED 3 WATT.

IP55 protection.

Diameter 11,6 cm.



Wiring with metal base.

IP55 protection.

Diameter 10 cm. Fastening by hex screw ke



Wiring with plastic screw base.

13 - IP20 protection. E3 - IP55 protection.

Diameter 6 cm.



Wiring with metal base.

IP55 protection.

Diameter 20 cm. Fastening by hex screw ke



Wiring with plastic screw base.

13 - IP20 protection. E3 - IP55 protection.

Diameter 10 cm.



Wiring with plastic base and metal inserts. 12 - IP20 protection. E2 - IP55 protection. Diameter 10 cm. Fastening by slot screwdriv



Wiring with plastic screw base. 13 - IP20 protection. E3 - IP55 protection. Diameter 15 cm.



Wiring with plastic base and LED CANDY LIGHT. IP44 protection.

Diameter 10 cm.

CUSTOM BASE

Special metal base. IP20 protection. Several sizes.

MATERIAL PROPERTIES

Material: Linear low-density polyethylene - LLDPE.

Production process: rotational moulding.

Resistant to extreme temperatures (-60°C to +80°C).

UV resistant (except for lighting colours).

High tensile strength.

WARNING

- Keep away from excessive heat sources.
- Avoid any improper use. Do not stand on the products. When the product has to be moved, lift the product off the ground in order to avoid damage.
- Do not overload the pot structure in order to avoid deforming.
- Carefully comply with the maintenance & cleaning instructions.
- In case of malfunctioning or damage of the wiring or any electrical parts, refer to a qualified electrician.

MAINTENANCE & CLEANING

- To prevent dust and dirt from sticking to the plastic surfaces, periodically clean the products with a damp cloth and neutral liquid soap diluted in water.
- Avoid using ethanol or any liquids containing, even in small amounts, acetone, trichloroethylene or ammonia (solvents in general).
- The lacquered version is also suitable for outdoor use, however it is more sensitive to scratches: periodically clean with a polish cleaner, gently rubbing with soft cloth/cotton wool.
- Cushions can be cleaned with a damp cloth, neutral liquid soap and water.
- For metal parts use specific cleaners.

WE WELCOME ALL CUSTOM ORDERS!

IES files upon Request

sales@gordonbullard.com www.bullardbollards.com 1-877-964-4646



991 South Gull Lake Dr Richland, MI 49083 US USA