

GLOBO 30

CE		Year of Version Materia Cable o Dimens Weight Packag	mp / table lamp production: 1999 s: lighting. al: Polyethylene. color: Black ions: Ø 30 cm(11.81") : 1,2 Kg ing: 31 x 31 x 31 cm ing volume: 0,03 m ³
DIMENSIONS (cm)	30 30 7,6		30 30 7,6
CODE	LP SFF030	LP SFF032	LA SFE030 🐔 👸 IP55 lighting LED
IIGHTING	1 x F1 IP55* * Note: earth spike included for additional mounting option see page 10*	1 x E3/13 MEDIUM Note: earth spike on demand	KIT LED 3W RGB MULTICOLOUR (included). With battery charger and remote control (battery life 8hrs - charging time 10 hrs).
COLOURS	LIGHTING O LIGHT WHITE (code LA) <u>GLOSSY FINISH</u>	LIGHTING O LIGHT WHITE (code LA) <u>MATT FINISH</u>	LED VERSION O LIGHT WHITE (code LA) <u>MATT FINISH</u>

WE WELCOME ALL CUSTOM ORDERS!

IES files upon Request


sales@gordonbullard.com www.bullardbollards.com 1-877-964-4646




991 South Gull Lake Dr Richland, MI 49083



GLOBO COMPONENTS





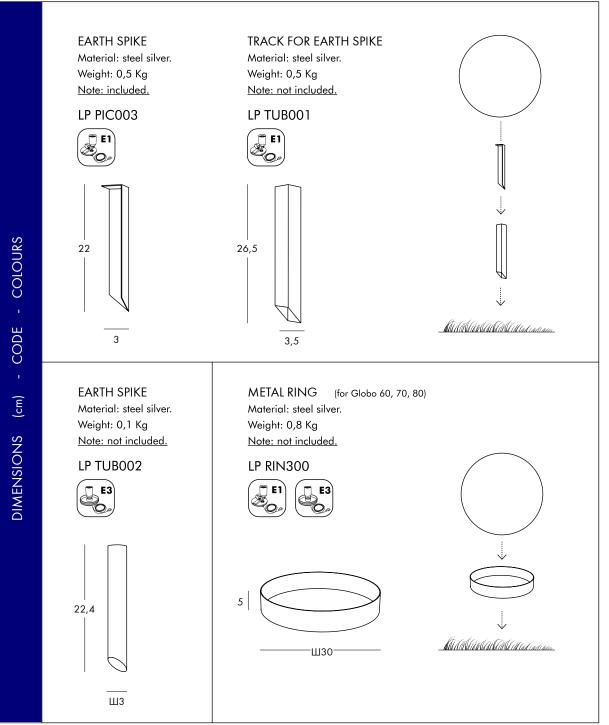

sales@gordonbullard.com www.bullardbollards.com 1-877-964-4646 991 South Gull Lake Dr Richland, MI 49083

USA USA


Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all sheet sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

С

Updated 10/02/23



ADDITIONAL MOUNTING OPTIONS

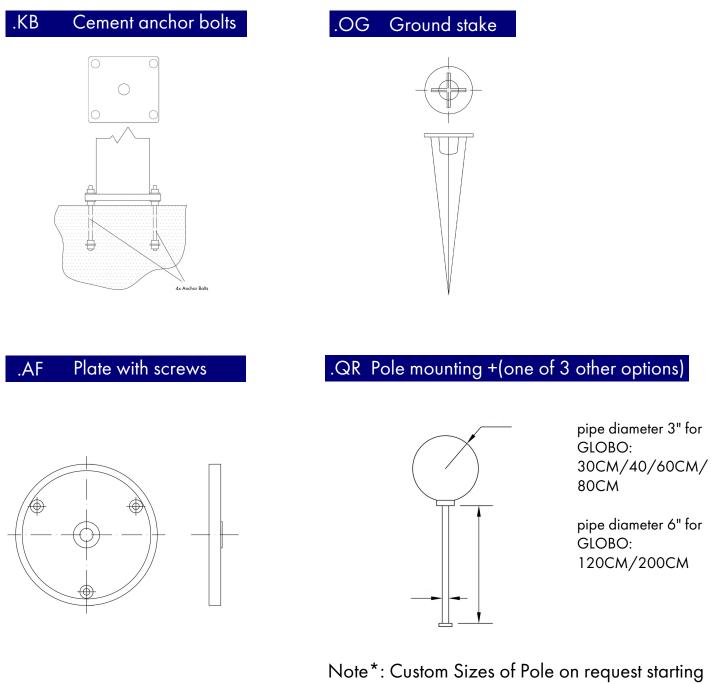

from 3 inches

WE WELCOME ALL CUSTOM ORDERS!

IES files upon Request

sales@gordonbullard.com www.bullardbollards.com 1-877-964-4646 **C**



Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all sheet sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

SYMBOLS

For indoor use.	Stackable item.				
For indoor and outdoor use.	100% recyclable polyethylene.	Recycling and disposal of electronic			
Outdoor version on re (ββδ\$)		waste (WEEE).			
LIGHTING SYMBOLS					
Protected against the intrusion of soli objects Ⅲ > 12 mm, not against wat		RGB RGB lighting system.			
Protected against the intrusion of soli objects Ш > 1 mm and splashing wc	id 👾 Iter <u>e4</u> Lamp base for G4 halogen bulb.	(CANDY LIGHT Item compatible with Candy Light.			
Protected against the intrusion of duant and water jets.		Insulation class 1.			
Fully protected against the intrusion dust and immersion in water.	of the Lamp base for G13 neanNutreen	Insulation class 2.			
Small lamp base for E14 - 14 mm E14 light bulb.	다. NEON tube lighting system.	Insulation class 3.			
(<u>E26</u>) Medium lamp base for E26 - 26 mm light bulb.	n 🙄 LED technology lighting system.	Device proper to direct assembly onto normally inflammable surfaces.			
 Lighting through energy saving bulb. The upper figure shows the number of allowed bulbs. The lower figure shows the MAXIMUM recommended www Lighting through neon tube. Lighting through neon tube. Lighting through energy saving globe bulb. Lighting through neon tube. Lighting through energy saving globe bulb. The upper figure shows the number of allowed neon tupes 					
W The lower figure shows the MAXIMUM recommended www The lower figure shows the MAXIMUM recommended power. Lighting through flexible LED tube. The lower figure shows the MAXIMUM recommended power. Lighting through circular T9 neon tube. The upper figure shows the number of allowed neon tubes. The lower figure shows the MAXIMUM recommended power. WIRING SYMBOLS					
Wiring with metal clamp. IP20 protection. Diameter 11 cm. Wiring with special base for KIT LED 3 WATT. IP55 protection. Diameter 11,6 cm.					
E1 SMALL Diameter 10 cm. F	base. E3/13 SMALL	Wiring with plastic screw base. 13 - IP20 protection. E3 - IP55 protection. Diameter 6 cm.			
E1 LARGE Diameter 20 cm. F	base. Eastening by hex screw key	Wiring with plastic screw base. 13 - IP20 protection. E3 - IP55 protection. Diameter 10 cm.			
I2/E2 I2 - IP20 protectio	e base and metal inserts. n. E2 - IP55 protection. Fastening by slot screwdriver.	Wiring with plastic screw base. 13 - IP20 protection. E3 - IP55 protection. Diameter 15 cm.			
CANDY LIGHT Wiring with plastic IP44 protection. Diameter 10 cm.	base and LED CANDY LIGHT.	Special metal base. IP20 protection. Several sizes.			

Material: Linear low-density polyethylene - LLDPE. Production process: rotational moulding. Resistant to extreme temperatures (-60°C to +80°C). UV resistant (except for lighting colours). High tensile strength.

WARNING

- Keep away from excessive heat sources.
- Avoid any improper use. Do not stand on the products. When the product has to be moved, lift the product off the ground in order to avoid damage.
- Do not overload the pot structure in order to avoid deforming.
- Carefully comply with the maintenance & cleaning instructions.
- In case of malfunctioning or damage of the wiring or any electrical parts, refer to a qualified electrician.

MAINTENANCE & CLEANING

- To prevent dust and dirt from sticking to the plastic surfaces, periodically clean the products with a damp cloth and neutral liquid soap diluted in water.
- Avoid using ethanol or any liquids containing, even in small amounts, acetone, trichloroethylene or ammonia (solvents in general).
- The lacquered version is also suitable for outdoor use, however it is more sensitive to scratches: periodically clean with a polish cleaner, gently rubbing with soft cloth/cotton wool.
- Cushions can be cleaned with a damp cloth, neutral liquid soap and water.
- For metal parts use specific cleaners.

WE WELCOME ALL CUSTOM ORDERS!

IES files upon Request

sales@gordonbullard.com www.bullardbollards.com 1-877-964-4646



991 South Gull Lake Dr Richland, MI 49083

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all sheet sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.