


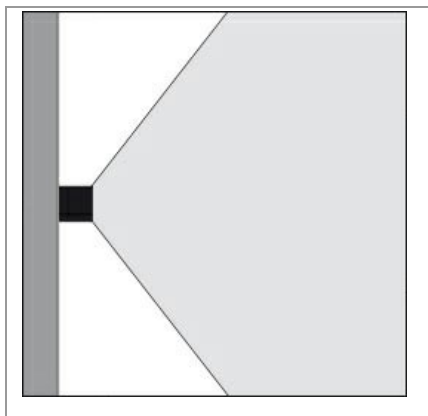


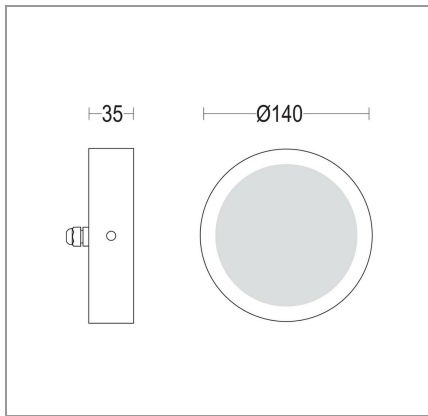

## MIDISPIA FLAT CEILING 140

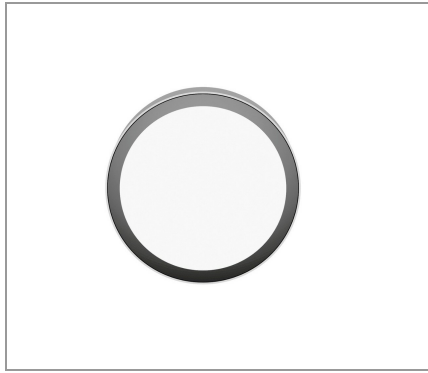

GH1386.FAXO300EN  
1386.EEX.O

GH1386.FAXO400EN  
1386.EFX.O

H(m)	φ(m)	Lux Medi
5	15.2	1
4	12.2	2
3	9.1	3
2	6.1	7
1	3.0	30

H(m)	φ(m)	Lux Medi
5	15.2	1
4	12.2	2
3	9.1	4
2	6.1	8
1	3.0	32

### CONSTRUCTIVE & DIMENSIONAL:

Application field:	Stair steps, Passageways, Ramps, Walkways and driveways
External screws:	Stainless steel A4-70 treated with highly antioxidant water-repellent lubricating solution
Diameter:	140mm(5,51")
Height:	35mm(1,37")

### ELECTRICAL and LIGHTING SOURCE for MODEL: GH1386.FAXO300EN 1386.EEX.O

Description:	1 x 12 W LED 3000 K CRI>85 1300 lm
Operating Power:	110-277 V / 50-60 Hz
Number of heads:	1
Number of circuits:	1
Driver positioning:	Integral
Control gear type:	Electronic
Cable entry:	Fixture supplied with pre-wired cable H05RN-F
Cord length:	0,5m
Water-Lock system:	Included
Emergency kit:	Not available
Light source:	LED
Power:	12 W
ZVEI - Led Type:	DOB
Color temperature:	3000 K
Color rendering index:	CRI>85
Nominal LED emission:	1300 lm
Light source:	Included
Ambient temperature operating range:	- 20 °C ÷ +35 °C

### ELECTRICAL and LIGHTING SOURCE for MODEL: GH1386.FAXO400EN 1386.EFX.O

Description:	1 x 12 W LED 4000 K CRI>85 1400 lm
Operating Power:	110-277 V / 50-60 Hz
Number of heads:	1
Number of circuits:	1
Driver positioning:	Integral
Control gear type:	Electronic
Cable entry:	Fixture supplied with pre-wired cable H05RN-F
Cord length:	0,5m
Water-Lock system:	Included
Emergency kit:	Not available
Light source:	LED
Power:	12 W
ZVEI - Led Type:	DOB
Color temperature:	4000 K
Color rendering index:	CRI>85
Nominal LED emission:	1400 lm
Light source:	Included
Ambient temperature operating range:	- 20 °C ÷ +35 °C

### OPTICAL:

Beam Type:	Ceiling extrawide
Light distribution:	Symmetric
Beam directionability:	Fixed
Diffuser material:	Soda-lime tempered glass 5mm
Diffuser finish:	Opal
Diffuser temperature:	< 40 °C / 104 °F

### FINISH CODE:

■ .05 Dark grey (matt)	■ .19 Light Grey
------------------------	------------------

### NOTE:

Dimmable trailing edge