



PRODUCT INFO:

Item codes:	4000-EL83-GR / 4000-EL84-GR / 4000-EL83-AL / 4000-EL84-AL
Installation type:	Wall mounted
Environments:	Residential lighting, hallway, wellness, urban landscape
Mounting type:	Surface
Body:	Polycarbonate housing. Snap-in latches built into the structure.
Painting:	Injection molded body in colored polymer blend.
Standard Colour:	GR graphite satin finish or AL aluminium grey

DIMENSIONS:

Total device height: (mm)	150(5.90")
Total device width: (mm)	27(1.06")
Total device length: (mm)	340(13.38")

OPTICAL:

Beam:	Asymmetrical
Emission:	Direct
Adjustable:	No

LIGHTING SOURCE for model 4000-EL83-GR

MacAdam:	Step 3
Output Flux:	380 lm
Source:	LED
System power:	9W
Temperature colour:	3000K CRI>80

LIGHTING SOURCE for model 4000-EL84-GR


MacAdam:	Step 3
Output Flux:	425 lm
Source:	LED
System power:	9W
Temperature colour:	4000K CRI>80

LIGHTING SOURCE for model 4000-EL83-AL

MacAdam:	Step 3
Output Flux:	424 lm
Source:	LED
System power:	9W
Temperature colour:	3000K CRI>80

LIGHTING SOURCE for model 4000-EL84-AL


MacAdam:	Step 3
Output Flux:	475 lm
Source:	LED
System power:	9W
Temperature colour:	4000K CRI>80

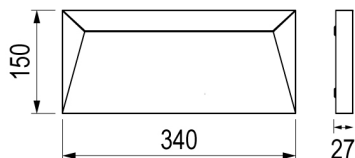

sales@gordonbullard.com
 www.bullardbollards.com
 1-877-964-4646




991 South Gull Lake Dr
 Richland, MI 49083
 USA

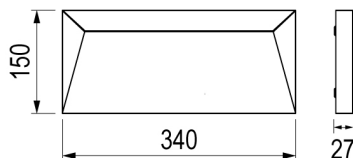


ELECTRICAL:

Ballast type:	ON-OFF.
Frequency:	50-60Hz
Lifetime:	70.000h L80B10 (T _a =25°C)
Line input:	Use only (EN 60598-1) a three core H07RN-F rubber cable with diameter between 7,5 and 12mm.
Mounting ballast type:	Integral
Voltage:	110-277V
Separate ignition:	No
Emergency 1E:	No
Emergency 3E:	No


PHOTOMETRICS for model 4000-EL83-GR




PHOTOMETRICS for model 4000-EL84-GR



PHOTOMETRICS for models 4000-EL83-AL



PHOTOMETRICS for model 4000-EL84-AL



sales@gordonbullard.com
 www.bullardbollards.com
 1-877-964-4646



991 South Gull Lake Dr
 Richland, MI 49083
 USA