





### PHOTOMETRICS:




D44K/P01-LWNEB-AL

h (m)	Ø (m)	— $\gamma=0.0$ $\alpha=13^\circ$	Ø (m)	---- $\gamma=0.0$ $\beta=43^\circ$	Emed (lx)
5.00	1.29		3.91		5
4.00	1.03		3.13		8
3.00	0.77		2.35		15
2.00	0.52		1.57		33
1.00	0.26		0.78		131



D44K/P01-LWWEB-AL

h (m)	Ø (m)	— $\gamma=0.0$ $\alpha=13^\circ$	Ø (m)	---- $\gamma=0.0$ $\beta=43^\circ$	Emed (lx)
5.00	1.29		3.91		5
4.00	1.03		3.13		8
3.00	0.77		2.35		14
2.00	0.52		1.57		31
1.00	0.26		0.78		126

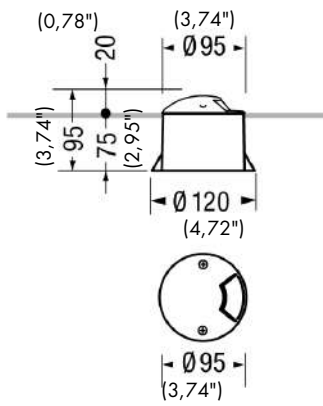

### OPTIONAL ACCESSORIES:

#### Electrical



ACS/CR1

Fast IP68 connector 1bar (10m-1h) for cable Ø7-12mm - 3x1.5mm.



ACS/CR6

4 ways IP68 wiring box for cable Ø5-14mm - 3x1,5mm.

### INCLUDED ACCESSORIES:

Rough-in housing

Ground and Wall rough-in housing box, high impact resistant composite technopolymer (Code PT0781).

