



EDGE SQ



(EN) WARNING:


- The safety of this fixture is guaranteed only if you comply with these instructions; remember to keep in a safe place.
- The appliance must not be tampered with or transformed and it must be installed and used as supplied and in compliance with the national rules on installations.
- Switch-off the power supply before carrying out any maintenance operations. hot plug-in is not allow and may cause damage to the luminaire.
- The light source contained in this luminaire shall be replaced only by the manufacturer or his service agent.
- Installation and service must be performed by qualified service personnel.
- Use the unit only complete with diffuser.
- Any non-compliant installations will invalidate all forms of guarantee.

DEGREE OF PROTECTION	IMPACT RESISTANCE
IK00	Nessuna protezione/ No protection
IK01	up to 0,150 J
IK02	up to 0,200 J
IK03	up to 0,350 J
IK04	up to 0,500 J
IK05	up to 0,700 J
IK06	up to 1,00 J
IK07	up to 2,00 J
IK08	up to 5,00 J
IK09	up to 10,00 J
IK10	up to 20,00 J


IP RATING	DEFINITION
IP 44	Protection against the penetration of solid bodies greater than 1 mm. Protection against the penetration of liquids by drops, vapors or spray in any direction. The penetration of solid bodies of less than 1 mm and liquids must not damage the equipment.
IP 54	Total protection against the penetration of solid bodies. Protection against the penetration of liquids by drops, vapors or splashes in any direction. The penetration of dust and liquids must not damage the equipment.
IP 65	Total protection against the penetration of solid bodies and dust. Protection against the penetration of liquids by drops, vapors, splashes and jets of water in any direction. Liquid penetration must not damage the equipment.
IP 66	Total protection against the penetration of solid bodies and dust. Protection against the penetration of liquids from splashes, storm surges and strong jets of water in any direction. Liquid penetration must not damage the equipment.
IP 67	Total protection against the penetration of solid bodies and dust. Protection against momentary immersion in water for 30 minutes at a depth of 1 meter.
IP 68	Total protection against the penetration of solid bodies and dust. Protection against permanent immersion in water at a depth of 1 meter.

	Class II appliance.
	Class III appliance.
	Photobiological risk, the possibility that light causes damage to the human eye.
	Replace damaged shields.
	Min. distance from the light fixture.
	EN Do not dispose of in residual waste. ES No eliminar junto con la basura domestica. FR Ne pas jeter dans les ordures ménagères.
	Waterlock system.
	the product is suitable for vehicles.
	Maximum weight supported by the product. Kg
	Human touch.
	Disconnect the power supply before carrying out any type of maintenance.
	Periodic cleaning and maintenance.
	Very low voltage.
	Warning!
	Do not cover the recess with thermally insulating material.


EDGE SQ

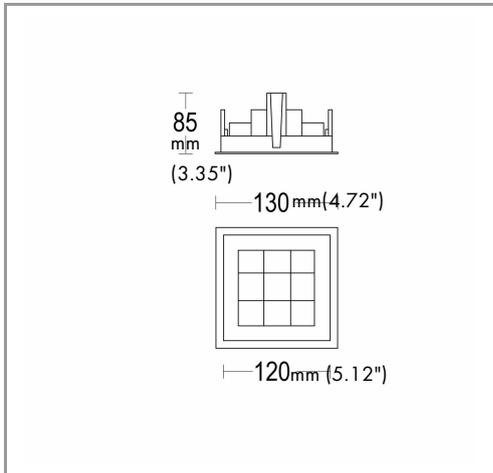

MAXIEDGE SQ

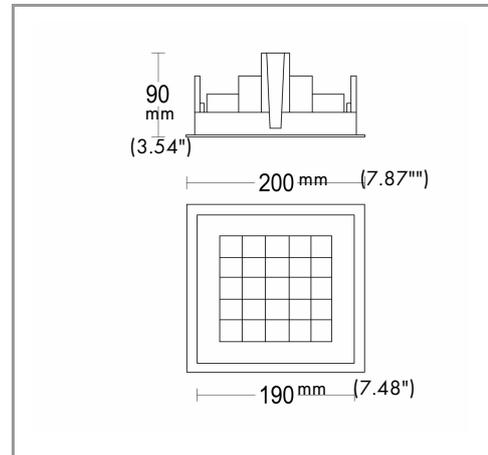


Switch-off the power supply

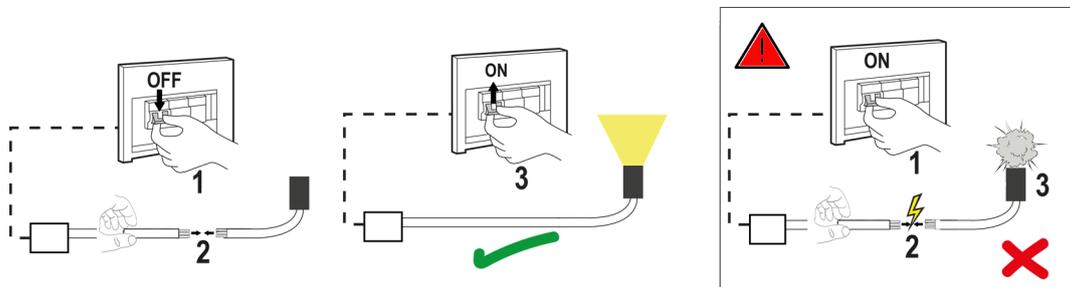

FRAME


1

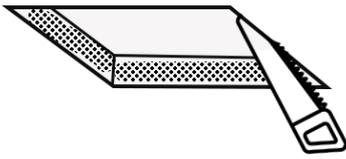



Hole size

Edge SQ : 123x123 mm
Maxi Edge SQ: 190x190 mm

2

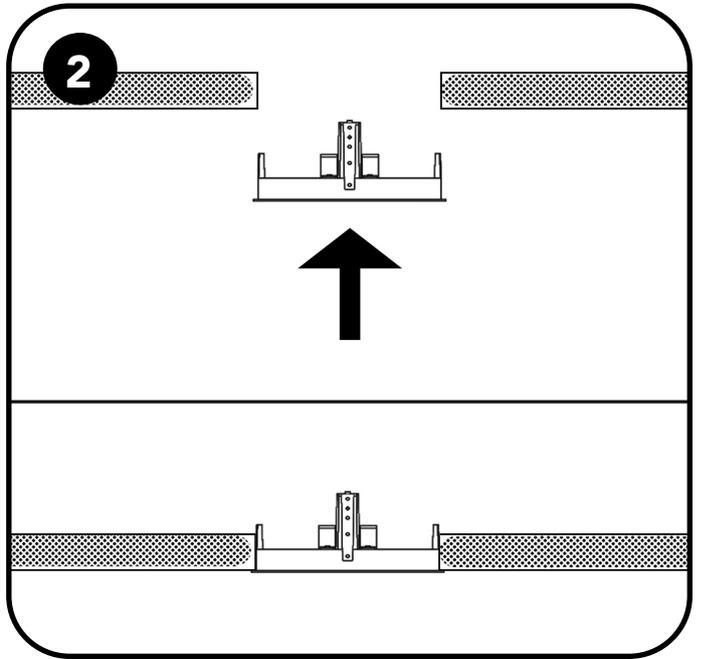


3

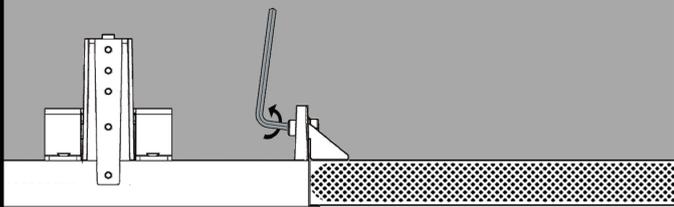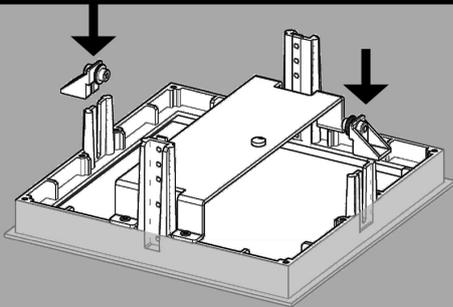


thickness MIN 2 mm - MAX 27 mm


4

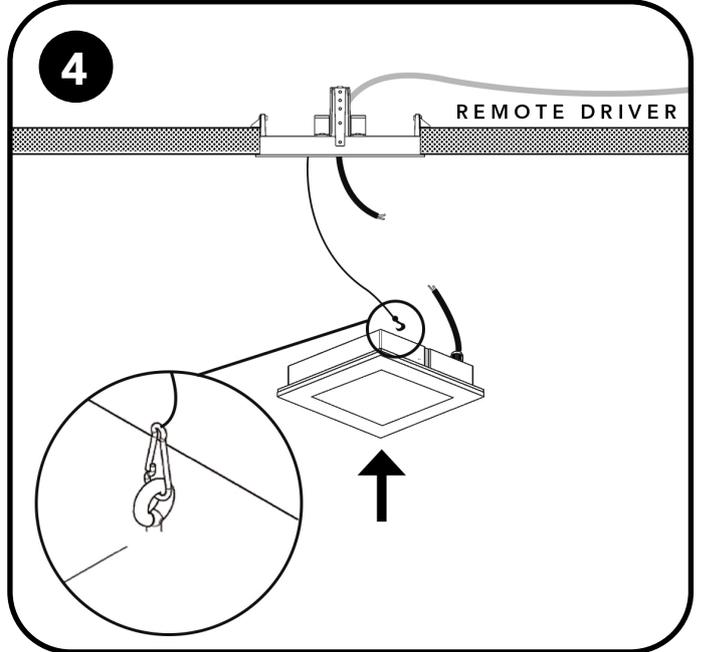

5






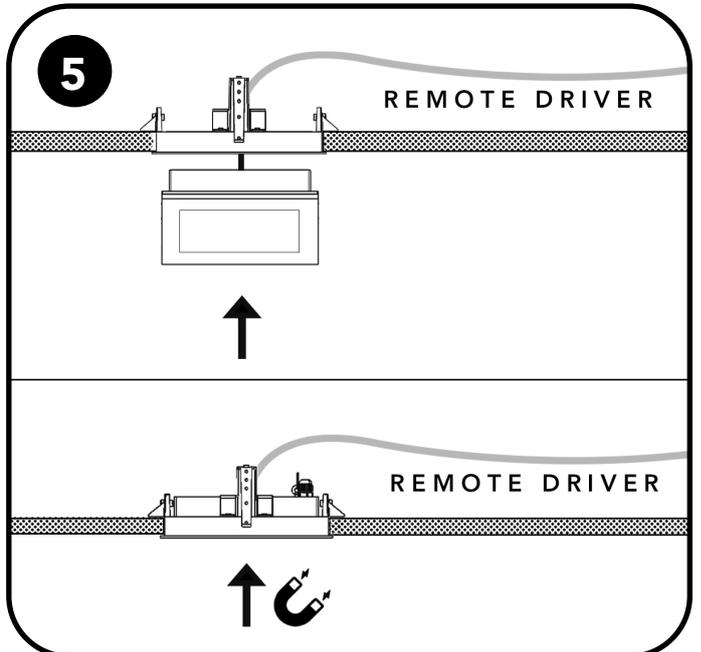




CONNECTION

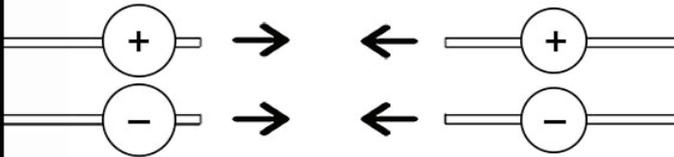

MIN IP 67 CONNECTION


TRIMLESS

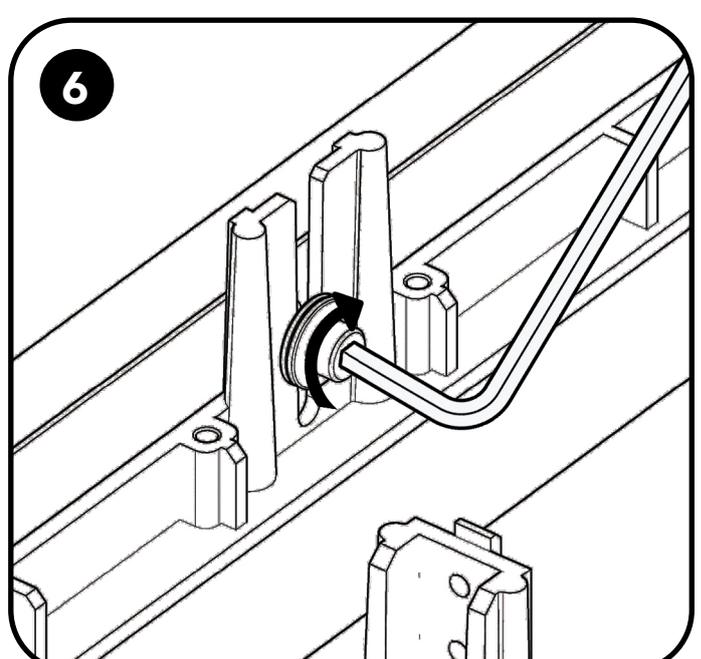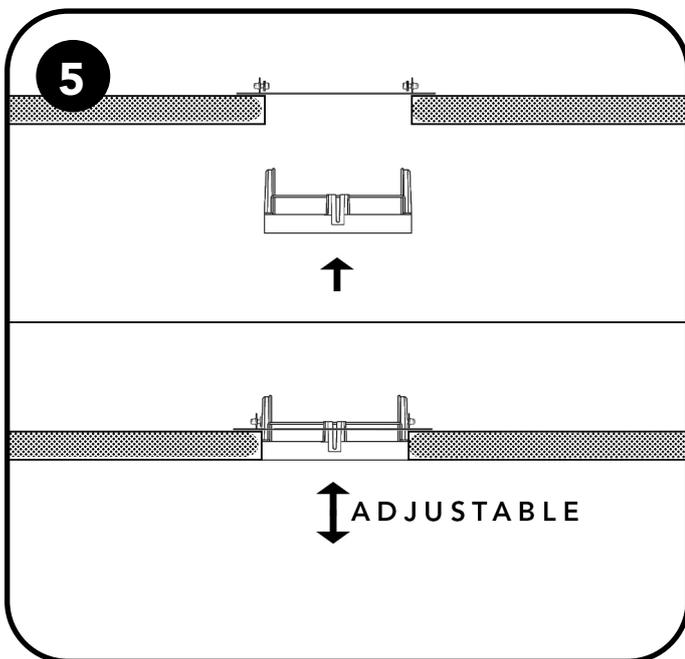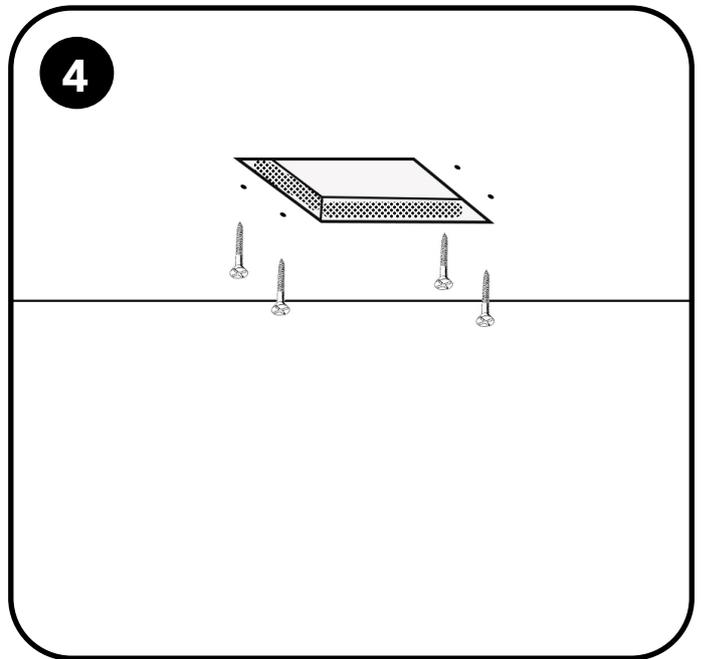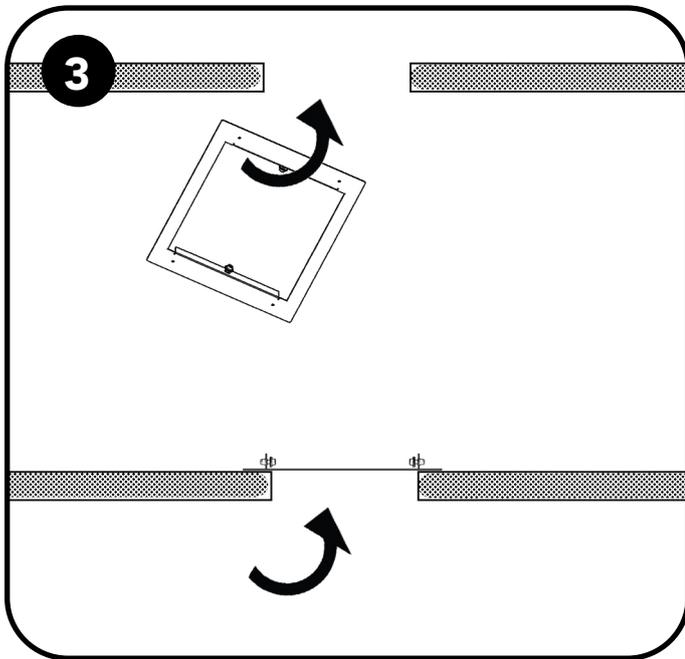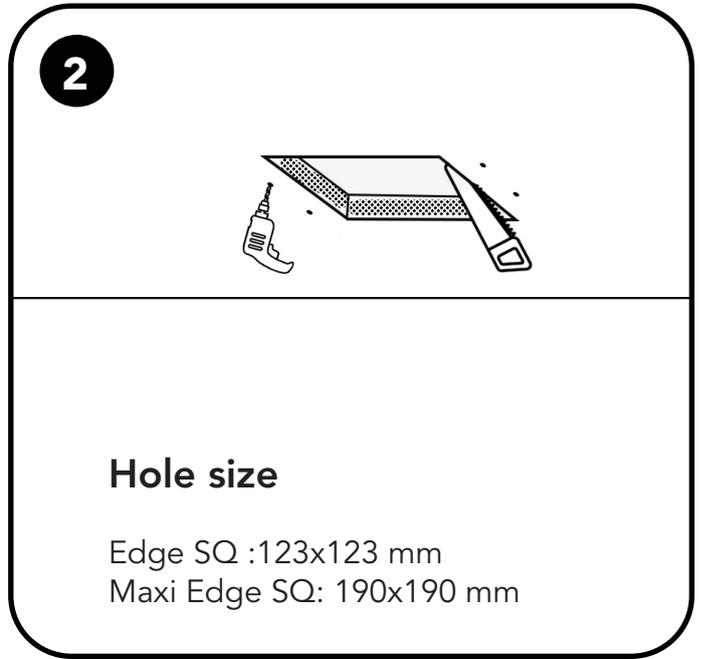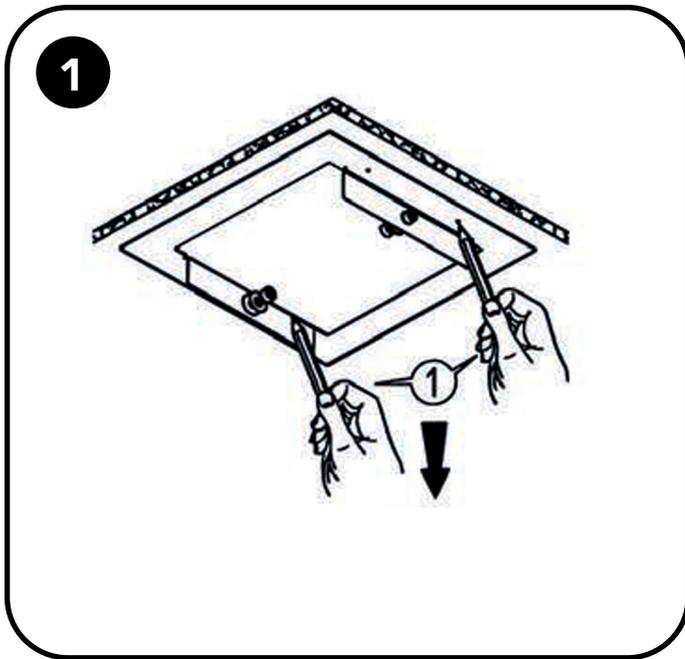

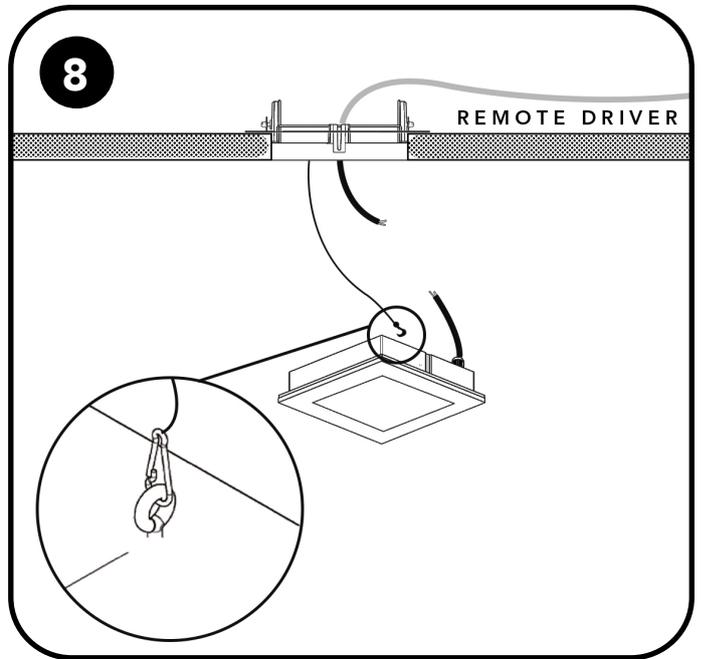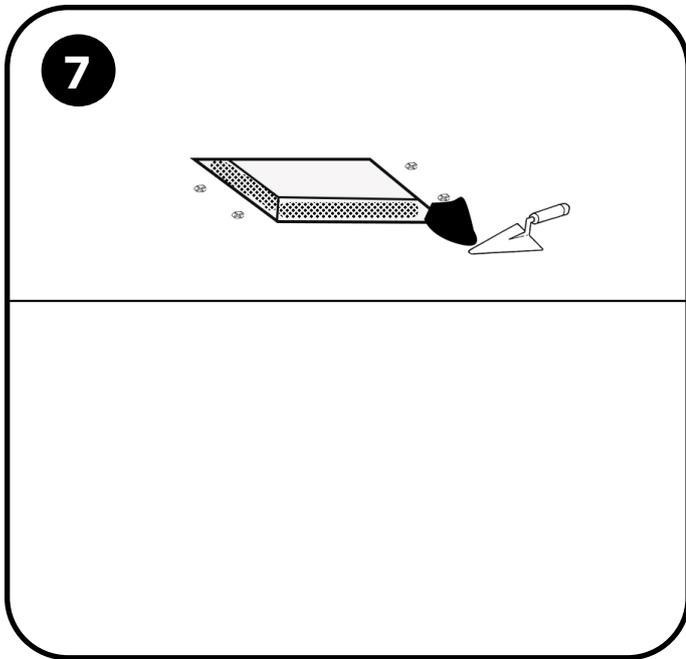

CONNECTION

MIN IP 67 CONNECTION

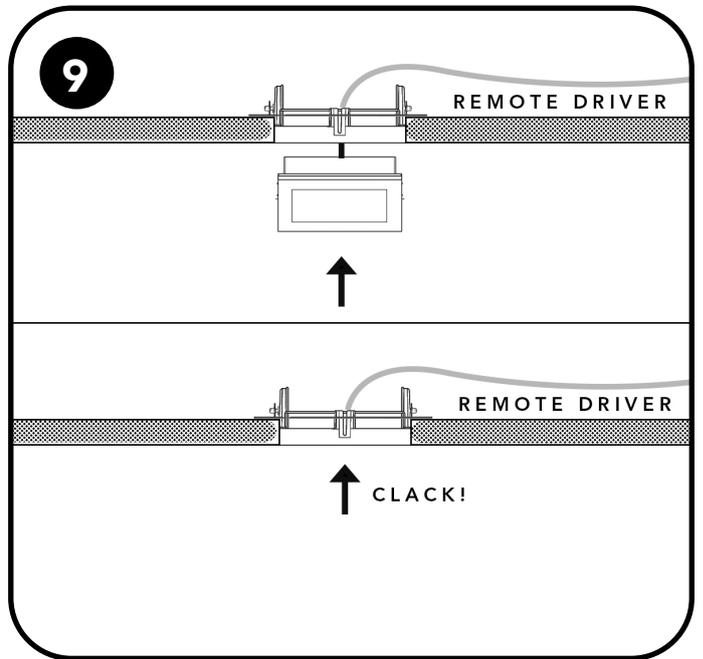

EN - In respect and compliance to environmental standards at the end of life do not dispose of as standard waste, this must be taken to one of the authorized collection points.