



NICEA 4F

Recess walk-over spotlights

Code: 3127


Application

Floor

- Recessed drive-over spotlight IP67 IK10 with 2x1.7W LEDs
- Aluminum alloy body with aluminum or steel flange
- Floor installation with outer casing provided
- Fixing screws are hidden by the finishing flange and the lamp can be positioned independently of the outer casing
- Non-dazzling dome with inclined LEDs for greater light emission
- Provided with 39.37" (1m) of 2x 19.685" (0.5m) Neoprene cable
- Power supply unit not included
- Resinated base to prevent the entry of humidity

KELVIN	CRI	REAL OUTPUT
2700	90	~ 65/65
3000	90	~ 80/80
4000 5000	75	~ 85/85



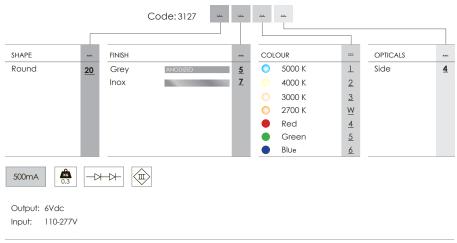

ACCESSORIE	S
330002100	Power supply for max 1 pcs
330002200	Power supply for max 6 pcs
307500010	Neoprene cable 2x0.5
307500020	IP68 connector

Mail: sales@gordonbullard.com

. 53mm 2,09"

Web: www.bullardbollards.com

Tel: 1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all sheet sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies. © copyright Gordon Bullard 2023
Updated 05/10/23