













Application


Installation with adjustable bracket or on ground with steel picket


- IP66 Floodlight with 1 led of 6.7W
- Aluminum anodized and varnished alloy body with glass front protection
- Installation with bracket, with steel picket or base
- Withdrawn non-dazzling optic
- Provided with 1m of 3x1 neoprene cable
- Power supply unit incorporated


| KELVIN | CRI | LUMEN EFFETTIVI |
|--------|-----|-----------------|
| 2700K | 90 | ~ 510 |
| 3000K | 90 | ~ 650 |
| 4000K | 80 | ~ 680 |
| | | |





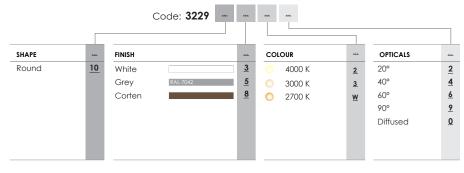





Input: 110-277V

| ACCESSORIES | |
|-------------|---------------------|
| 307500012 | Neoprene cable 3x1 |
| 307500019 | Steel picket |
| 307500029 | Non dazzling system |

Mail: sales@gordonbullard.com

Web: www.bullardbollards.com

Tel: 1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

US

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all sheet sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.