













Application


Ceiling / wall / floor


- Adjustable floodlight IP66
- Aluminum alloy body with glass front protection
- Installation with bracket or on ground with steel picket
- Withdrawn non-dazzling optic
- Provided with 1m of 3x1 neoprene cable
- Power supply unit incorporated



Application Installation with base on ceiling





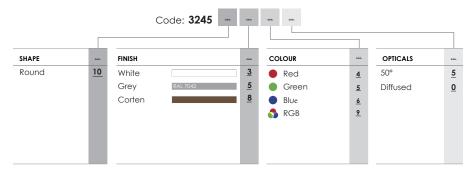

350mA	0,9	− Ы − Ы	(III)
-------	-----	-----------------------	-------

Output: 6Vdc X 3CH Input: 110-277V

ACCESSORIES	ACCESSORIES	
330004800	PUSH control unit for max 4pcs	
307500013	Neoprene cable 6x0.5	

Mail: sales@gordonbullard.com

Web: www.bullardbollards.com

Tel: 1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

115

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all sheet sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.