














NARON FLAT SURFACE 3,2W Recess walk-over spotlights Code: 3220 Application Ceiling / wall / floor

- Recessed walk-over spotlight IP66 IK10 with 1x3,2W LED
- Aluminum alloy body with PMMA flange
- Ceiling, wall or floor installation with outer casing provided
- Provided with 1m of 2x0.5 Neoprene cable
- Power supply unit not included

KELVIN	CRI	REAL OUTPUT
2700	90	~ 235
3000	90	~ 295
4000 5000	75	~ 300














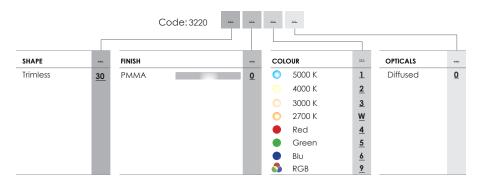

350mA







Output: 9.6Vdc Input: 110-277V

ACCESSORIE	S
305000013	Outer casing
330001900	Power supply for 1 pc
330002000	Power supply for max 4 pcs
307500010	Neoprene cable 2x0.5
307500020	IP68 connector
307500027	NO-W system, 2 pole cable interrupting
307500040	NOW System with 24vdc - 350mA converter

Mail: sales@gordonbullard.com

Web: www.bullardbollards.com

Tel: 1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

US

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all sheet sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.