

Rinoa IP65 RGB

Linear systems

Code: 3076


Application

Ceiling / wall

- Adjustable linear lamp RGB IP40 with
- 60x0.24W LEDs/m
- Extruded aluminum alloy body with
- PMMA front protection.
- Ceiling or wall installation with adjustable brackets provided
- Customised length of max 2m
- Provided with 1m of 4x0.5 cable
- Power supply unit not included





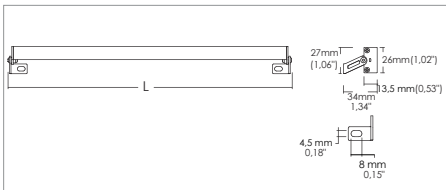

KELVIN	CRI	REAL OUTPUT
2700	90	~ 1850/m
3000	90	~ 1940/m
4000	75	~ 2500/m



Code: 3076

SHAPE	FINISH	COLOR	OPTICALS	LENGHT
Linear	Anodized	RGB	Diffused Transparent	(max 2000)

24Vdc    

 Output: 24Vdc
 Input: 110-277V

ACCESSORIES

- 330000400 RGB control unit with remote controller for max 20m
- 330007100 Power supply 24V 320W for control unit

Mail: sales@gordonbullard.com

Web: www.bullardbollards.com

Tel: 1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA