

**Rinoa IP65**

Linear systems

Code: 3076


**Application**

Ceiling / wall

- Extruded aluminum alloy body with
- PMMA front protection.
- Ceiling or wall installation with adjustable brackets provided
- Customised length of max 2m
- Provided with 1m of 2x0.35 cable
- Power supply unit not included




KELVIN	CRI	REAL OUTPUT
2700	90	~ 1520/m
3000	90	~ 1600/m
4000	75	~ 2025/m

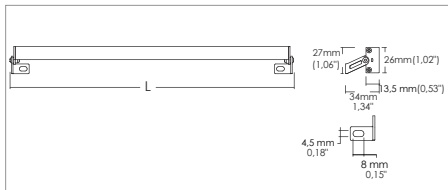

Code: 3076

SHAPE	FINISH	COLOR	OPTICALS	LENGHT
Linear	Anodized	4500 K 3500 K 3200 K	Diffused Transparent	(max 2000)


 Output: 24Vdc  
 Input: 110-277V

**ACCESSORIES**

330003500	Power supply for max 1.7m
330003400	Power supply for max 2,9m
330003100	Power supply for max 4,9m
330007100	Power supply for max 7,4m
307500016	White PVC cable 2x0.35

Mail: sales@gordonbullard.com

Web: www.bullardbollards.com

Tel: 1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA