

Rinoa Power IP65

Linear systems

Code: 3077

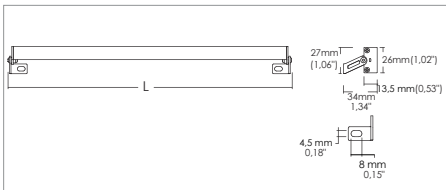
Application

Ceiling / wall


- Extruded aluminum alloy body with
- PMMA front protection.
- Ceiling or wall installation with adjustable brackets provided
- Customised length of max 2m
- Provided with 1m of 2x0.35 cable
- Power supply unit not included



KELVIN	CRI	REAL OUTPUT
2700	90	~ 1850/m
3000	90	~ 1940/m
4000	75	~ 2500/m


 Code: **3077**

SHAPE	FINISH	COLOR	OPTICALS	LENGHT
Linear	Anodized	4500 K 3500 K 3200 K	Diffused Transparent	(max 2000)


 Output: 24Vdc
 Input: 110-277V

ACCESSORIES

330003500	Power supply for max 1m
330003400	Power supply for max 2m
330003100	Power supply for max 3.4m
330007100	Power supply for max 5m
307500016	White PVC cable 2x0.35

 Mail: sales@gordonbullard.com

 Web: www.bullardbollards.com

Tel: 1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA