











Silo IP65 Linear systems **Application** Ceiling / wall Extruded aluminum alloy body with polycarbonate front protection Ceiling or wall installation with clips provided Uniform light effect Customised length of max 2m Provided with 1m of 2x0.35 cable Power supply unit not included

KELVIN	CRI	REAL OUTPUT
2700 3200	90	~ 700/m
3000	90	~ 740/m
4000	75	~ 870/m







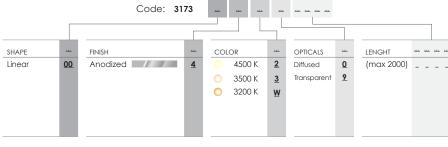

* * | 24Vdc

Output: 24Vdc Input: 110-277V

Code: 3173

ACCESSORIES		
330000400	RGB control unit with remote controller for max 20m	
330007100	150w 24vdc power supply	

Mail: sales@gordonbullard.com

Web: www.bullardbollards.com

Tel: 1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all sheet sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.