

CODE:
BB-B3EME0459-SP

LIGHT SOURCE:
4×3.5W

SELECTED DEGREE:
30°


INPUT VOLTAGE:
110-277V

OPERATING CURRENT:
73 mA

CONSUMPTION:
73W

LUMINANCE:
1206 lm

IK:
05



CODE:
BB-B3FME0958-SP

LIGHT SOURCE:
9×3W

SELECTED DEGREE:
30°


INPUT VOLTAGE:
110-277V

OPERATING CURRENT:
133 mA

CONSUMPTION:
30W

LUMINANCE:
2541 lm

IK:
05

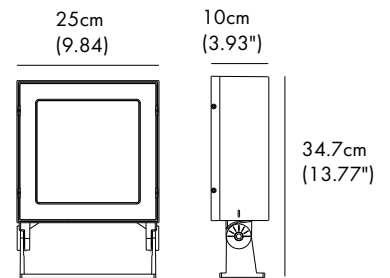

CODE:
BB-B3GME2558-SP

LIGHT SOURCE:
25×3W

SELECTED DEGREE:
30°

INPUT VOLTAGE:
110-277V

OPERATING CURRENT:
306 mA

CONSUMPTION:
71W

LUMINANCE:
5832lm

IK:
05



sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA


WATER PROOF SOLUTION



- A Water-Stopper(Included)**
A IP-66 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.
- B IP67 Jiffy quick plug/socket connector(Optional)**
A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.

ACCESSORIES(Optional)

BEVEL CUT HOOD



| ID | Fitted Item |
|--------|-------------|
| CA3023 | B3EME0459 |
| CA3024 | B3FME0958 |
| CA3025 | B3GME2558 |



- HOUSING** 12# Die-casting aluminum finishing or powder painting
T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
- LIGHT WINDOW** Tempered glass.T=3mm
- LED** NICHIA
- LED DRIVER** Constant Voltage Input, Constant Current Output IP68 PG-9
- CABLE GLAND** PA66
- GASKET** Tooling shaped seal
- POWER CABLE** Outside of luminaire
110-277VV: H05RN-F 3×1.0mm², L=2.0m

REGULAR PAINTING COLOR

| Basic | Secondary |
|---|--|
|  Dark Grey KAP 7037 |  Silver Grey KAP 9022 |
| |  Sanded Black RAL 9005 |

OPTICS

Referenced Degree(°) 01/2

| Optic ID | 9° | 15° | 20° | 30° | 45° | 60° |
|----------|----|-----|-----|-----|-----|-----|
| FB11B4 | | | | | | |
| FB12B5 | | | | | | |

FEATURE



Gear: The gear between the luminaire housing and the U bracket to prevent sliding.

OVERVIEW






sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA




PHOTOMETRIC

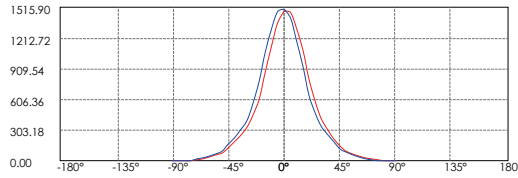

Lux distance Curve

| | Illuminance of a Distance | |
|-----|---------------------------|----------------|
| | Center Beam LUX | Beam Width V H |
| 2m | 369.27 LUX | 1.4m 1.4m |
| 4m | 92.32 LUX | 2.8m 2.8m |
| 6m | 41.03 LUX | 4.2m 4.3m |
| 8m | 23.08 LUX | 5.6m 5.7m |
| 10m | 14.77 LUX | 7.0m 7.1m |
| 12m | 10.26 LUX | 8.4m 8.5m |




Vert.Spread:38.6 Horiz.Spread:39.0

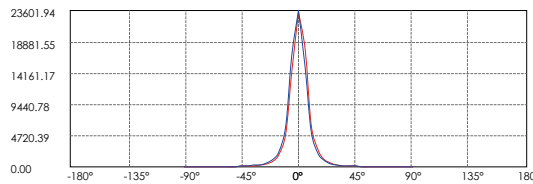

Lux distance Curve

| | Illuminance of a Distance | |
|-----|---------------------------|----------------|
| | Center Beam LUX | Beam Width V H |
| 2m | 5877.80 LUX | 0.5m 0.5m |
| 4m | 1454.95 LUX | 1.0m 1.0m |
| 6m | 647.53 LUX | 1.5m 1.5m |
| 8m | 364.24 LUX | 2.0m 2.0m |
| 10m | 233.11 LUX | 2.4m 2.4m |
| 12m | 161.88 LUX | 2.9m 2.9m |

Vert.Spread:14.0 Horiz.Spread:14.0

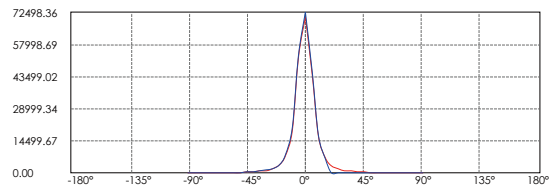

Lux distance Curve

| | Illuminance of a Distance | |
|-----|---------------------------|----------------|
| | Center Beam LUX | Beam Width V H |
| 2m | 17602.81 LUX | 0.5m 0.5m |
| 4m | 4400.70 LUX | 1.0m 1.0m |
| 6m | 1955.87 LUX | 1.4m 1.5m |
| 8m | 1100.18 LUX | 1.9m 2.0m |
| 10m | 704.11 LUX | 2.4m 2.5m |
| 12m | 488.97 LUX | 2.9m 3.0m |

Vert.Spread:13.8 Horiz.Spread:14.2



sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA