



CODE:	BB-C3FKA1057-SP
LIGHT SOURCE:	10×1.5W
LENS:	C18
SELECTED DEGREE:	94°×76°
INPUT VOLTAGE:	110-277V
OPERATING CURRENT:	91 mA
CONSUMPTION:	20.1W
LUMINANCE:	1206 lm
IK:	06

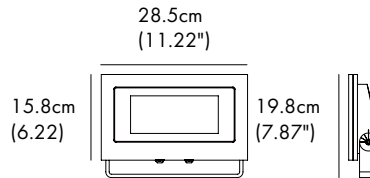

CODE:	BB-C3GKA1257-SP
LIGHT SOURCE:	12×2W
LENS:	C18
SELECTED DEGREE:	78°×40°
INPUT VOLTAGE:	110-277V
OPERATING CURRENT:	118 mA
CONSUMPTION:	26.3W
LUMINANCE:	2541 lm
IK:	06

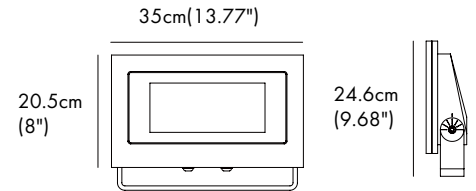

CODE:	BB-C3HKA2157-SP
LIGHT SOURCE:	21×1.7W
LENS:	C18
SELECTED DEGREE:	80°×60°
INPUT VOLTAGE:	110-277V
OPERATING CURRENT:	172 mA
CONSUMPTION:	38W
LUMINANCE:	5832lm
IK:	06




sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

WATER PROOF SOLUTION

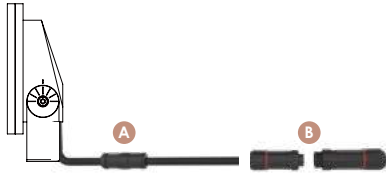

- A Water-Stopper(Included)**
A IP-66 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.
- B IP67 Jiffy quick plug/socket connector(Optional)**
A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.

HOUSING	12# Die-casting aluminum finishing or powder painting T=60-80µm.Adhesion of ISO class 1/ASTM class 4B
LIGHT WINDOW	Tempered glass,T=3mm
LED	NICHIA
LED DRIVER	Constant Voltage Input, Constant Current Output IP68 PG-9
CABLE GLAND	PA66
GASKET	Tooling shaped seal
POWER CABLE	Outside of luminaire 110-277V: H05RN-F 3×1.0mm ² , L=2.0m

REGULAR PAINTING COLOR

Basic	Secondary	
 Dark Grey KAP 7037	 Silver Grey KAP 9022	 Sanded Black RAL 9005

OPTICS

Referenced Degree(°)θ1/2

 C18	 L01 $\frac{80}{60}$ F077YS
--	--

FEATURE




Gear: The gear between the luminaire housing and the U bracket to prevent sliding.

OVERVIEW



BEAM DEMO



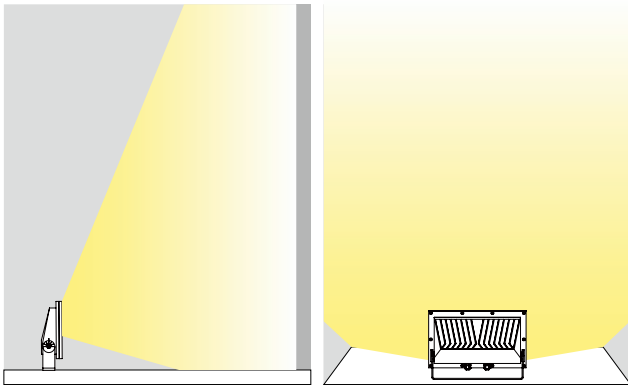


sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA




PHOTOMETRIC

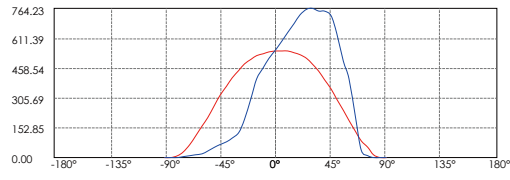

Lux distance Curve

	Illuminance at a Distance	
	Center Beam LUX	Beam Width V H
2m	136.34 LUX	4.3m 3.2m
4m	34.08 LUX	8.7m 6.3m
6m	15.15 LUX	13.0m 9.5m
8m	8.52 LUX	17.3m 12.6m
10m	5.45 LUX	21.7m 15.8m
12m	3.79 LUX	26.0m 18.9m

Vert.Spread:94.6 Horiz.Spread:76.5

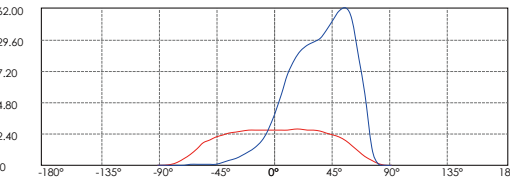

Lux distance Curve

	Illuminance at a Distance	
	Center Beam LUX	Beam Width V H
2m	92.73 LUX	3.6m 2.4m
4m	23.18 LUX	7.1m 4.8m
6m	10.30 LUX	10.7m 7.2m
8m	5.80 LUX	14.3m 9.6m
10m	3.71 LUX	17.8m 12.0m
12m	2.58 LUX	21.4m 14.4m

Vert.Spread:83.5 Horiz.Spread:62.1



sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA