

ITEM	HEIGHT(cm)	LIGHT SOURCE	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
BB-D9ARL8434A-B	40cm(15.74")	84×0.1W OSRAM	110-277V	59	11.4	697	05
BB-D9ARM8434A-B	55cm(21.65")						
BB-D9ARH8434A-B	80cm(31.49")						

HOUSING T=60-80µm Adhesion of ISO class 1/ASTM class 4B 12#
Die-casting powder coated aluminum.

LIGHT WINDOW PMMA

LED SMD2835

LED DRIVER Constant Voltage Input, Constant Current Output


OPERATING TEMPERATURE -20 °C~40 °C

POWER CABLE Outside of luminaire
110-277V: H05RN-F 3×1.0mm², L=0.5m

BASE Flange base

DIMMING SUPPORT Triac PWM Available
1-10V Dali Customized

Modular Light Source and Power with IP-66

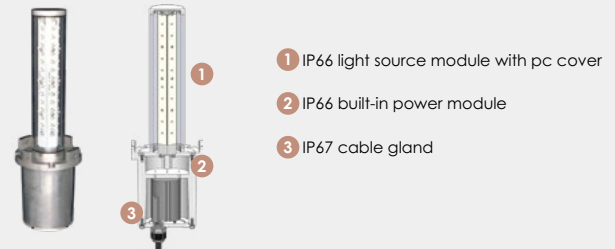


REGULAR PAINTING COLOR

Basic Sanded Black RAL 9005



Secondary Dark Grey KAP 7037

Light Sanded Grey RAL 7038

INSTALLATION BASE

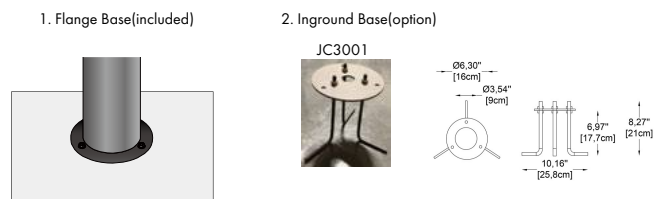

PHOTOMETRIC

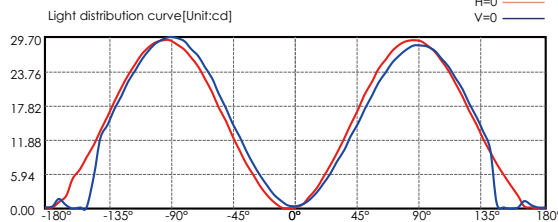

Lux distance curve

Height (m)	Center Beam LUX	Beam Width (m)
2m	0.03 LUX	0.0m 1.7m
4m	0.01 LUX	0.0m 3.3m
6m	0.00 LUX	0.0m 5.0m
8m	0.00 LUX	0.0m 6.6m
10m	0.00 LUX	0.0m 8.3m
12m	0.00 LUX	0.0m 9.9m

Vert. Spread: 0.0, Horiz. Spread: 45.0



sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA