

ITEM	HEIGHT(cm)	LIGHT SOURCE	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
BB-D9ADL4234A-B	30cm(11.81")	42x0.2W OSARM	110-277V	38	8.2	586	07
BB-D9ADM4234A-B	55cm(21.65")						
BB-D9ADH4234A-B	80cm(31.49")						

**HOUSING** T=60-80µm Adhesion of ISO class 1/ASTM class 4B 12#  
Die-casting powder coated aluminum.

**LIGHT WINDOW** PMMA

**LED** SMD2835

**LED DRIVER** Constant Voltage Input, Constant Current Output


**OPERATING TEMPERATURE** -20°C~40°C

**POWER CABLE** Outside of luminaire  
110-277V: H05RN-F 3x1.0mm<sup>2</sup>, L=0.5m

**BASE** Flange base

**DIMMING SUPPORT** Triac PWM Available  
1-10V Dali Customized

### Modular Light Source and Power with IP-66



- 1 IP66 light source module with pc cover IP66
- 2 built-in power module
- 3 IP67 cable gland


### REGULAR PAINTING COLOR

**Basic**  
Sanded Black  
RAL 9005




**Secondary**  
Dark Grey  
KAP 7037

Light Sanded Grey  
RAL 7038

### INSTALLATION BASE

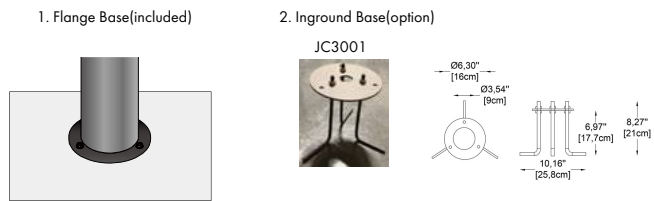

### PHOTOMETRIC

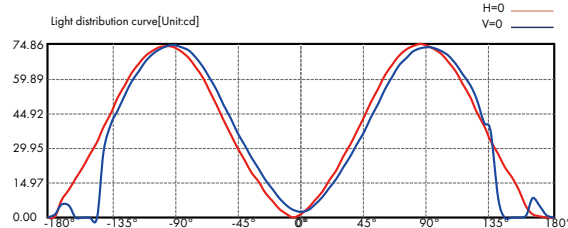

Lux distance curve

Center Beam LUX	Beam Width V H
0.36 LUX	0.0m 0.0m
0.09 LUX	0.0m 0.0m
0.04 LUX	0.0m 0.0m
0.02 LUX	0.0m 0.0m
0.01 LUX	0.0m 0.0m
0.01 LUX	0.0m 0.0m

Vert.Spread:0.0 Horiz.Spread:0.0



sales@gordonbullard.com  
www.bullardbollards.com  
1-877-964-4646



991 South Gull Lake Dr  
Richland, MI 49083  
USA