

ITEM	HEIGHT	LIGHT SOURCE	LENS	SELECTED DEGREE(°)Ø1/2	INPUT VOLTAGE(V)	OPERATING CURENT (MA)	CONSUMPTION(W)	LUMINANCE (LM)	IK
BB-B9ATM0357-B	60cm(23.62")	3×2W OSRAM	B15	30°	110-277V	38	8.7	446	05
BB-B9ATM0357-B	80cm(31.49")								

- HOUSING** T=60-80µm Adhesion of ISO class 1/ASTM class 4B 12# Die-casting powder coated aluminum.
- LIGHT WINDOW** PMMA
- LED** SMD3030
- LED DRIVER** Constant Voltage Input, Constant Current Output
- OPERATING TEMPERATURE** -20°C~40°C
- POWER CABLE** Outside of luminaire 110-277V: H05RN-F 3×1.0mm², L=0.5m
- DIMMING SUPPORT** Triac PWM Available 1-10V Dali Customized

### BEAM DEMO




### REGULAR PAINTING COLOR

- Basic**
  - Sanded Black RAL 9005
  - Dark Grey KAP 7037
  - Light Sanded Grey RAL 7038
- Secondary**

### OPTICS



### PHOTOMETRIC

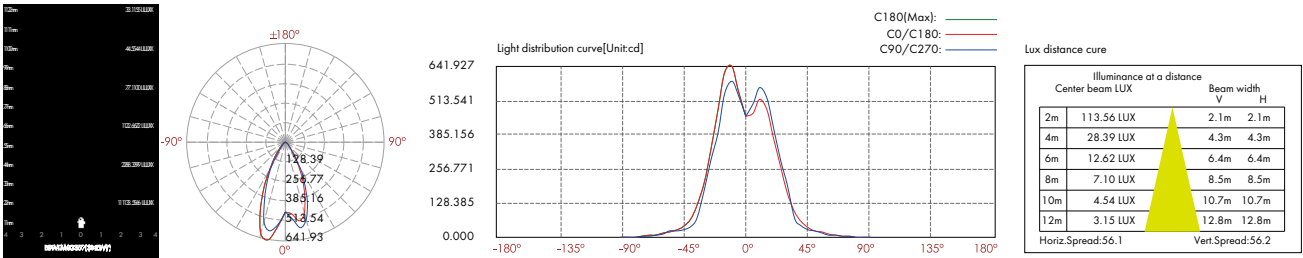

sales@gordonbullarda.com  
 www.bullardbollards.com  
 1-877-964-4646



991 South Gull Lake Dr  
 Richland, MI 49083  
 USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all sheet sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.