


ITEM	HEIGHT(cm)	LIGHT SOURCE	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
BB-B9AGL0166A-BB	30cm(11.81")	1×6W NICHIA	110-277V	77	7.3	183	07
BB-B9AGM0166A-BB	55cm(21.65")						
BB-B9AGH0166A-BB	80cm(31.49")						

- HOUSING** T=60-80µm Adhesion of ISO class 1 / ASTM class 4B 12# Die-casting powder coated aluminum.
- LIGHT WINDOW** PMMA
- LED** SMD4040
- LED DRIVER** Constant Voltage Input, Constant Current Output
- OPERATING TEMPERATURE** -20°C~40°C
- POWER CABLE** Outside of luminaire
110-277V: H05RN-F 3×1.0mm², L=0.5m
- BASE** Flange base
Triac PWM Available
- DIMMING SUPPORT** 1-10V Dali Customized

Modular Light Source and Power with IP-66





- 1 IP66 light source module with pc cover IP66
- 2 built-in power module
- 3 IP67 cable gland

REGULAR PAINTING COLOR




- Basic** Sanded Black RAL 9005
- Secondary** Dark Grey KAP 7037
- Light Sanded Grey RAL 7038

INSTALLATION BASE

1. Flange Base(included)
2. Inground Base(option)



PHOTOMETRIC

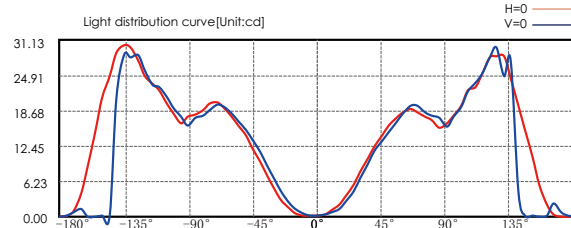

Illuminance at a Distance

Center Beam LUX	Beam Width
0.03 LUX	0.0m 0.0m
0.01 LUX	0.0m 0.0m
0.00 LUX	0.0m 0.0m
0.00 LUX	0.0m 0.0m
0.00 LUX	0.0m 0.0m
0.00 LUX	0.0m 0.0m
0.00 LUX	0.0m 0.0m

Vert.Spread:0.0 Horiz.Spread:0.0

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA