

ITEM	HEIGHT	LIGHT SOURCE	LENS	SELECTED DEGREE(°)Ø1/2	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
BB-B9AUL0128-B	40cm (15.7")	1×10W EDISON	B51	36°	110-277V	49	11	329	07
BB-B9AUM0128-B	70cm (27.5")								
BB-B9AUH0128-B	110cm (43.3")								
BB-B9AUT0128-B	251cm (98.81")								

**HOUSING** T=60-80um Adhesion of ISO class 1/ASTM class 4B 12#  
**LIGHT WINDOW** Die-casting powder coated aluminum.  
**LED** PMMA  
**LED DRIVER** AC COB LED  
**OPERATING** Constant Voltage Input, Constant Current Output  
**TEMPERATURE POWER** -20°C~40°C  
**CABLE** Outside of luminaire  
 110-277V: H05RN-F 3×1.0mm<sup>2</sup>, L=0.5m

### REGULAR PAINTING COLOR

**Basic** Sanded Black **RAL 9005** | **Secondary** Dark Grey **KAP 7037** | Light Sanded Grey **RAL 7038**

### OPTICS


**B51** | 20° 28° 36° 60°

### INSTALLATION BASE

1. Flange Base(included)




2. Inground Base(option)



Fitted Item: BB-B9AUL/M/HO128-IN

JC3005

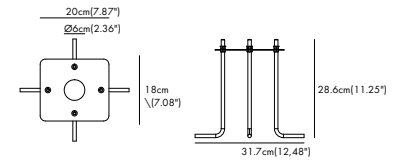

Fitted Item: BB-B9AUT0128-IN

• Flange base is a basic part which you need to assembled the landing base.




sales@gordonbullarda.com  
 www.bullardbollards.com  
 1-877-964-4646






991 South Gull Lake Dr  
 Richland, MI 49083  
 USA

## BEAM DEMO



A & B Height can be customized

## PHOTOMETRIC

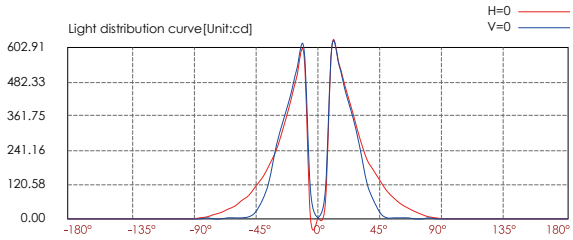

Lux distance curve

Center beam LUX	Beam width	
	V	H
2m 0.21 LUX	0.8m	2.2m
4m 0.05 LUX	1.6m	0.4m
6m 0.02 LUX	2.3m	0.7m
8m 0.01 LUX	3.1m	0.9m
10m 0.01 LUX	3.9m	1.1m
12m 0.01 LUX	4.7m	1.3m

Vert.Spread: 22.0 Horiz.Spread: 6.4



sales@gordonbullarda.com  
www.bullardbollards.com  
1-877-964-4646



991 South Gull Lake Dr  
Richland, MI 49083  
USA