

ITEM	HEIGHT	LIGHT SOURCE	INPUT VOLTAGE(V)	OPERATING CURENT (MA)	CONSUMPTION(W)	LUMINANCE (LM)	IK
BB-D9AYL3034 -B	49cm(19.29")	30×0.5W OSRAM	110-277V	90	19.5	2054	05
BB-D9AYM3034-B	89cm(35.03")						

**HOUSING** T=60-80µm Adhesion of ISO class 1/ASTM class 4B 12#  
**LIGHT WINDOW** Die-casting powder coated aluminum.  
**LED** PC  
**LED DRIVER** SMD3030  
**OPERATING** Constant Voltage Input, Constant Current Output  
**TEMPERATURE POWER** -20°C~40°C  
**CABLE** Outside of luminaire  
 110=277V: H05RN-F 3×1.0mm², L=0.5m  
**BASE** Flange Base  
**DIMMING SUPPORT** Triac PWM Available  
 1-10V Dali Customized


### BEAM DEMO




### REGULAR PAINTING COLOR

Basic: Sanded Black RAL 9005 | Secondary: Dark Grey KAP 7037 | Light Sanded Grey RAL 7038

### INSTALLATION BASE

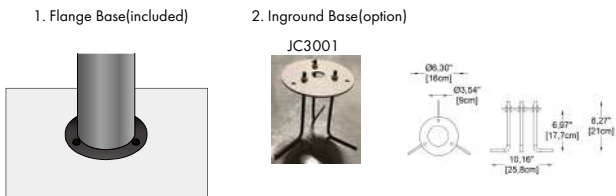

### ADJUSTABLE BEAM DIRECTION



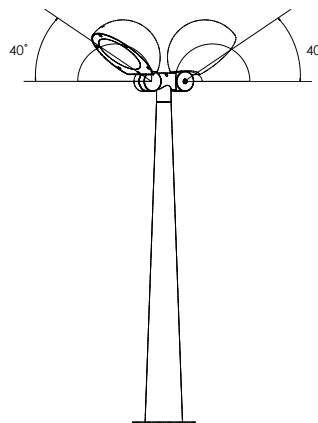


sales@gordonbullarda.com  
 www.bullardbollards.com  
 1-877-964-4646



991 South Gull Lake Dr  
 Richland, MI 49083  
 USA

**PHOTOMETRIC**

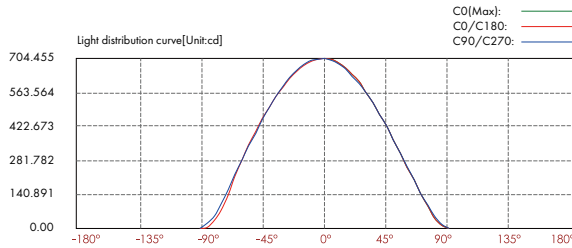

Lux distance curve

Center beam LUX	Beam width V	
	H	V
2m	5.3m	5.3m
4m	10.6m	10.5m
6m	15.9m	15.8m
8m	21.2m	21.1m
10m	26.5m	26.3m
12m	31.8m	31.6m

Horiz Spread: 105.9 Vert Spread: 105.6



sales@gordonbullarda.com  
www.bullardbollards.com  
1-877-964-4646



991 South Gull Lake Dr  
Richland, MI 49083  
USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all sheet sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.