





Floating lamp
 Year of production: 2001
 Versions: lighting.
 Material: Polyethylene.
 Dimensions: Ø 40 cm
 Weight: 2,5 Kg
 Packaging: 41 x 41 x 41 cm
 Packaging volume: 0,069 m3
 NB: transformer not included.


DIMENSIONS (cm)	
CODE	LP SFG040 lighting OUT 
LIGHTING	 LED bulb recommended (included). Warm light 3000K
COLOURS	LIGHTING <input type="radio"/> LIGHT WHITE (code LA)

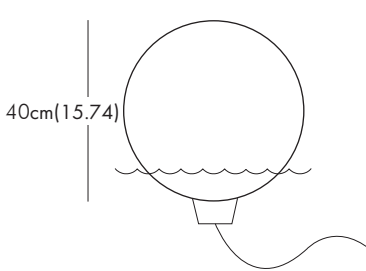


DIMENSIONS (cm) - CODE - COLOURS

Transformer for 1 Acquaglobo
220 V - 12 V
Weight: 0,6 Kg (shipped in the box of the Acquaglobo)


LP TRA001

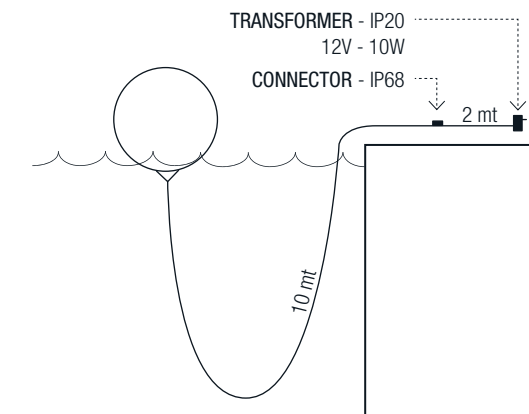


 The connector, the transformer and the plug must keep away from the water contact!





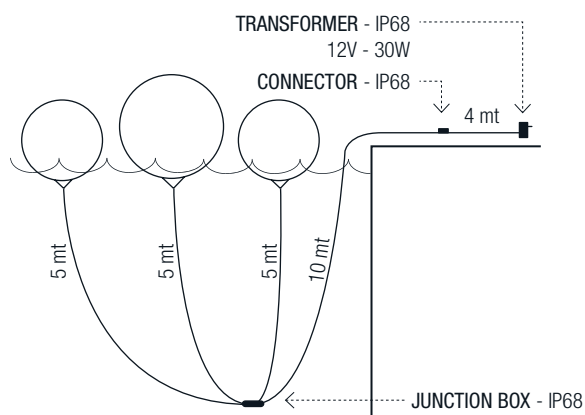

Transformer for 3 Acquaglobo
30 W + box derivation for 3 connection
Weight: 3 Kg (shipped in a separate box)

LP TRA003




























SYMBOLS

-  For indoor use.
-  Stackable item.
-  For indoor and outdoor use.
-  100% recyclable polyethylene.
-  Outdoor version on request (IP55).
-  European Community registered model.

LIGHTING SYMBOLS


-  Protected against the intrusion of solid objects $\varnothing > 12$ mm, not against water.
-  Lamp base for G4 halogen bulb.
-  RGB lighting system.
-  Protected against the intrusion of solid objects $\varnothing > 1$ mm and splashing water.
-  Lamp base for GU10 spotlight.
-  Item compatible with Candy Light.
-  Protected against the intrusion of dust and water jets.
-  Lamp base for G13 neon tube. Neon
-  Insulation class 1.
-  Fully protected against the intrusion of dust and immersion in water.
-  tube lighting system.
-  Insulation class 2.
-  Small lamp base for E14 - 14 mm light bulb.
-  LED technology lighting system.
-  Insulation class 3.
-  Medium lamp base for E26 - 26 mm light bulb.
-  Device proper to direct assembly onto normally inflammable surfaces.
-  Lighting through energy saving bulb.
The upper figure shows the number of allowed bulbs.
The lower figure shows the MAXIMUM recommended power.
-  Lighting through energy saving fluorescent spotlight.
The upper figure shows the number of allowed spotlights.
The lower figure shows the MAXIMUM recommended power.
-  Lighting through neon tube.
The upper figure shows the number of allowed neon tubes.
The lower figure shows the MAXIMUM recommended power.
-  Lighting through energy saving globe bulb.
The upper figure shows the number of allowed bulbs.
The lower figure shows the MAXIMUM recommended power.
-  Lighting through flexible LED tube.
The lower figure shows the MAXIMUM recommended power.
-  Lighting through circular T9 neon tube.
The upper figure shows the number of allowed neon tubes.
The lower figure shows the MAXIMUM recommended power.

MATERIAL PROPERTIES

Material: Linear low-density polyethylene - LLDPE.
 Production process: rotational moulding.
 Resistant to extreme temperatures (-60°C to +80°C).
 UV resistant (except for lighting colours).
 High tensile strength.

WARNING

Keep away from excessive heat sources.
 Avoid any improper use. Do not stand on the products. When the product has to be moved, lift the product off the ground in order to avoid damage.
 Do not overload the pot structure in order to avoid deforming.
 Carefully comply with the maintenance & cleaning instructions.
 In case of malfunctioning or damage of the wiring or any electrical parts, refer to a qualified electrician.




BULLARD BOLLARDS

WIRING SYMBOLS



I1
Wiring with metal clamp.
IP20 protection.
Diameter 11 cm.



**LED
3W**
Wiring with special base for KIT LED 3 WATT.
IP55 protection.
Diameter 11,6 cm.



**E1
SMALL**
Wiring with metal base.
IP55 protection.
Diameter 10 cm. Fastening by hex screw key.



**E3/I3
SMALL**
Wiring with plastic screw base.
I3 - IP20 protection. E3 - IP55 protection.
Diameter 6 cm.



**E1
LARGE**
Wiring with metal base.
IP55 protection.
Diameter 20 cm. Fastening by hex screw key.



**E3/I3
MEDIUM**
Wiring with plastic screw base.
I3 - IP20 protection. E3 - IP55 protection.
Diameter 10 cm.



I2/E2
Wiring with plastic base and metal inserts.
I2 - IP20 protection. E2 - IP55 protection.
Diameter 10 cm. Fastening by slot screwdriver.



**E3/I3
LARGE**
Wiring with plastic screw base.
I3 - IP20 protection. E3 - IP55 protection.
Diameter 15 cm.



**CANDY
LIGHT**
Wiring with plastic base and LED CANDY LIGHT.
IP44 protection.
Diameter 10 cm.



**CUSTOM
BASE**
Special metal base.
IP20 protection.
Several sizes.